



INSTRUCTIONS

J02033

2005-09-28



DEUCE RACK BAG KIT

GENERAL

Kit Number

98870-00A, 98871-00A, 98879-05A, 98880-05A, 98881-00A, and 98882-00A

Models

Table 1. Models

Kits	Models
98870-00A Nylon and 98871-00A Leather	FXSTD models equipped with Small Badlander and Snakeskin Backrest Pad Kit (51534-00 or 52549-00), Passenger Short Sissy Bar Upright Kit (51114-00), and Luggage Rack (53806-00).
98881-00A Nylon and 98882-00A Leather	FXSTD models equipped with Large Backrest Pad Kit (52050-00), Passenger Short Sissy Bar Kit (51114-00), and Luggage Rack (53806-00).
98880-05A Nylon and 98879-05A Leather	FXSTD models equipped with Tall Backrest Pad Kit (51099-02), Passenger Tall Sissy Bar Kit (51144-02), and Luggage Rack (53806-00).

⚠ WARNING

Improper installation of accessories or loading of cargo can affect motorcycle stability and handling, which could result in death or serious injury. (00455b)

NOTE

- This bag must be installed with the front pocket over the backrest pad.
- When installed on a luggage rack, the bag must not exceed the load limit of the luggage rack.
- Secure the bag to the luggage rack and backrest pad so that the bag will not shift during vehicle operation.
- Verify that the straps do not contact the rear wheel during vehicle operation.
- Refer to the SPECIFICATION section in the Owner's Manual for recommended tire inflation pressure and gross axle-weight rating. Do not exceed the vehicle's gross axle-weight rating.

Kit Contents

There are no Service Parts available with this kit.

INSTALLATION

1. See Figure 1. Slide the bag over the luggage rack so that the pocket (1) at the bottom of the bag covers the rack (2).



Figure 1. Install Bag on Rack (generic backrest shown)



Figure 2. Connect and Tighten the Straps (bottom view)

2. See Figure 1. Pull the pocket (3) at the front of the bag firmly over the backrest (4).

3. See Figure 2. Connect the straps from the front pocket to the connectors at the bottom of the bag. Tighten the straps until snug.
4. See Figure 3. Feed the loose strap ends through the ladder clips as shown.
5. Slide ladder clips so there is 1 inch of loose strap end.

NOTE

Be certain that after bag installation, excess strap material is secured with the ladder clips so that straps do not rub against painted surfaces. Strap material rubbing against painted surfaces may scratch or scuff the paint.

Failure to properly adjust straps and ladder clips may cause the straps to block the view of the tail lamp.

6. Check to be certain the bag is secure on the rack and backrest. Secure loose straps, strings and other material so that it cannot get caught in the wheel spokes or scuff the paint while you travel.

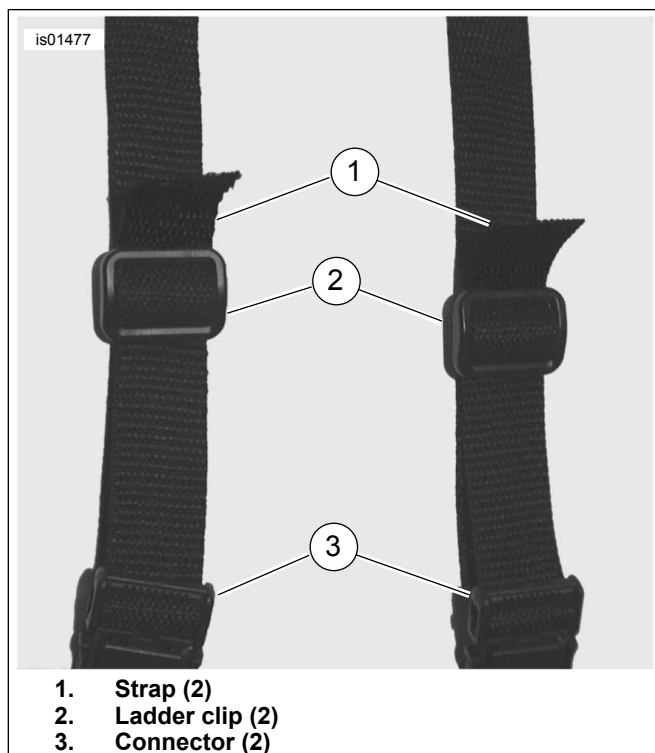


Figure 3. Ladder clips with 1 inch of loose strap end