# **INSTRUCTIONS**



J03222

DOME AND DUDDED FOOTDECC

# CHROME AND RUBBER FOOTPEGS

# **GENERAL**

## **Kit Numbers**

50130-95A and 50131-95A

## Models

For model fitment information, see the P&A retail catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

#### **A WARNING**

Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

#### Kit Contents

See Figure 2 and Table 1.

## INSTALLATION

- Remove the locknuts and screws that hold the existing footpegs in place. Save all hardware for installation of the new footpegs.
- Remove the existing footpegs along with the spring washers. Save the spring washers for later installation.

#### NOTE

See Figure 1. When performing Step 3, make sure the spring washer is positioned inside of the footpeg support with the square edge towards the inside of the support.

- Install the new footpegs in the same manner as the old footpegs were installed. Place a spring washer, along with the mount end of the footpeg, inside the slots of the footpeg supports.
- Secure each footpeg and spring washer with the screw and locknut removed earlier. Tighten the locknuts to 19 ft-lbs (26 Nm).
- See Figure 2. For each footpeg, insert the adjusting screw (8) in the recessed hole and begin to thread the screw. Position the footpeg as desired, then tighten the adjusting screw to 21 ft-lbs (29 Nm).

## **▲ WARNING**

Footrests must fold up and toward rear of motorcycle if struck. Failure to set footrests to fold up and back could result in death or serious injury. (00366a)




Figure 1. Footpeg Spring Washer Installation

# **Service Parts**

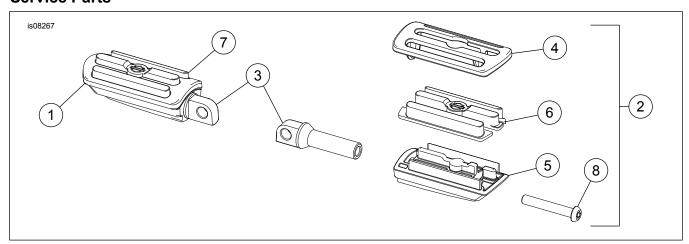


Figure 2. Service Parts

**Table 1. Service Parts** 

Item	Description (Quantity)	Part Number
3-Slot Footpeg Kit, Small (50131-95A)		
1	Footpeg assembly (left)	50162-04
2	Footpeg assembly (right)	50163-04
3	Mount, footpeg (2)	50135-95
4	Footpeg top, 3-slot	Not sold separately
5	Footpeg bottom, 3-slot	Not sold separately
6	Tread, Footpeg, right	50741-04
7	Tread, Footpeg, left	50742-04
8	Screw	4524
3-Slot Footpeg, Large (50130-95A)		
1	Footpeg assembly (left)	50143-04
2	Footpeg assembly (right)	50144-04
3	Mount, footpeg (2)	50135-95
4	Footpeg top, 3-slot	Not sold separately
5	Footpeg bottom, 3-slot	Not sold separately
6	Tread, Footpeg, left	50738-04
7	Tread, Footpeg, right	50737-04
8	Screw	4523

2/2 J03222