



INSTRUCTIONS

J01230

2006-10-24



CHROME FUEL PETCOCK COVER

GENERAL

Kit Number

62968-02

Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Additional Parts Required

LOCITE[®] 243 (blue) (Harley-Davidson Part Number 99642-97) is required to complete this installation. This product is available at any Harley-Davidson dealer.

Kit Contents

Table 1. Kit Contents

Description (Quantity)	Part Number
Cover, fuel valve	Not Sold Separately
Medallion	Not Sold Separately
Spring clip	11365
Set screw	Not Sold Separately
Label, cover, fuel valve	Not Sold Separately

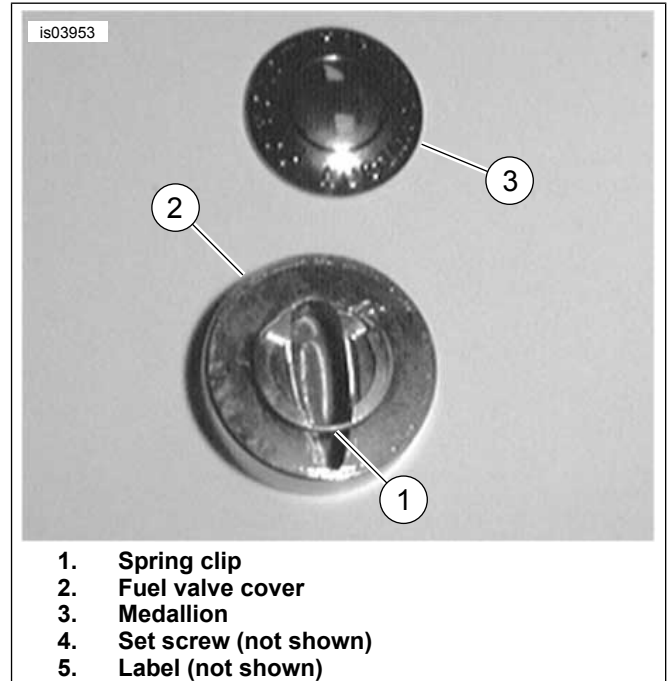


Figure 1. Spring Clip Orientation

INSTALLATION

- See Figure 1. Snap spring clip (1) into groove on backside of fuel valve cover (2). Be sure that clip is orientated and centered as shown.
- Position fuel valve in "on" position.
- Position fuel valve cover (2) with set screw hole up on the top, closest to the fuel tank, and slide onto valve so the spring clip (1) goes under handle of valve.
- Rotate knob to "off" position to gain access to set screw hole.
- Apply Loctite 243 Blue (Harley-Davidson Part Number 99642-97) to set screw (4) and tighten while pressing fuel valve cover flat against fuel valve.
- Return valve to "on" position. The notch will be in the down position.

- Remove backing from medallion (3). Place medallion onto face of fuel valve cover in desired orientation.
- Remove backing from label (5) and apply to top of fuel valve cover making sure it is orientated to read correctly.