



INSTRUCTIONS

J02411

2013-11-01



CLEAR/SMOKED BULLET STYLE OR VRSC TURN SIGNAL LENS KITS

GENERAL

Kit Numbers

69303-02, 69304-02, 69309-02, 693015-02

Models

For model fitment information, see the P&A retail catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

NOTE

A Service Manual for your motorcycle is available from your Harley-Davidson Dealer.

Kit Contents

See Figure 2 and Table 1.

INSTALLATION

1. See Figure 1. Locate the removal notch on the turn signal lens and carefully pry from housing. Discard lens. Repeat for remaining lenses.
2. Remove bulbs from turn signal assemblies.
3. Obtain new amber bulbs from kit. Install the bulbs marked **1157A** (Dual Filament) to the front turn signal assemblies. Install the bulbs marked **1156** (Single Filament) to the rear turn signal assemblies.

NOTE

See Figure 1. VRSC (V-Rod) Models have unique rear turn signal lenses. The rear lens is identified with a dimple mark in the center of lens. The front has no dimple.

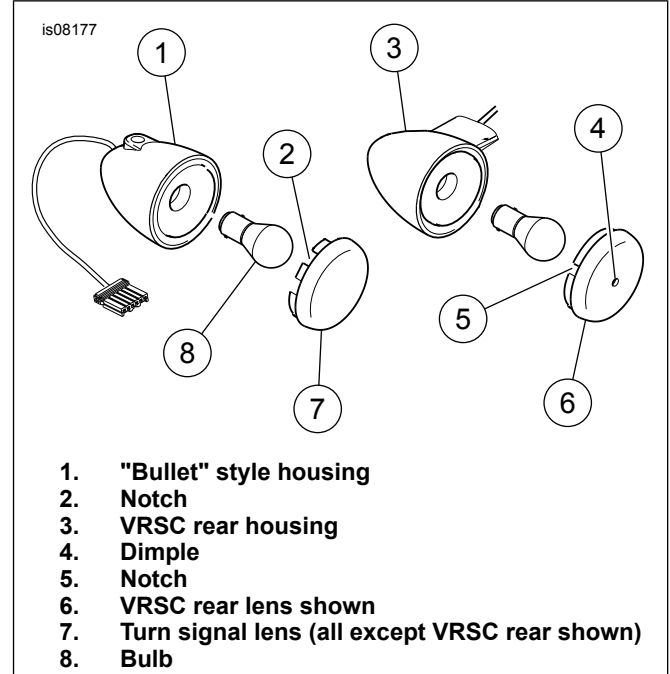


Figure 1. "Bullet" and VRSC Turn Signal Lenses

4. Obtain new lens from kit and install by snapping into place. Check turn signals for proper operation.

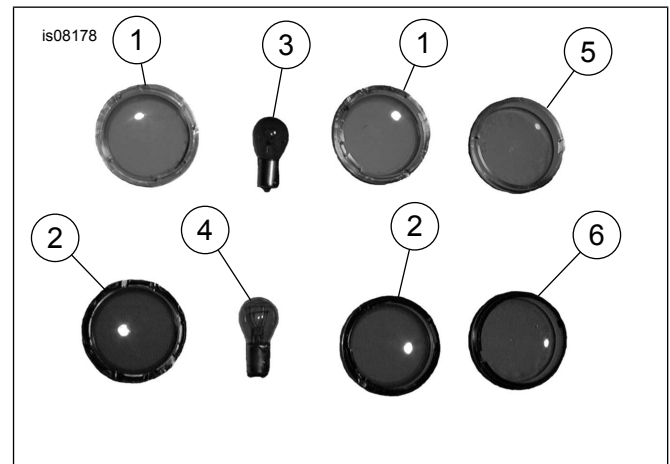


Figure 2. Service Parts

Table 1. Service Parts

Item	Description (Quantity)	Part Number
Kit Number 69303-02		
1	Clear lens, bullet, front and rear (4)	69324-02
Kit Number 69304-02		
2	Smoked lens, bullet, front and rear (4)	69325-02

Table 1. Service Parts

Item	Description (Quantity)	Part Number
3	Bulb, amber (front) double filament	69331-02
4	Bulb, amber (rear) single filament	69330-02
Kit Number 69309-02		
1	Clear lens, VRSC, front (2)	69324-02
5	Clear lens, VRSC, rear (2)	69322-02
Kit Number 69315-02		
2	Smoked lens, VRSC, front (2)	69325-02
6	Smoked lens, VRSC, rear (2)	69323-02
3	Bulb, amber (front) double filament	69331-02
4	Bulb, amber (rear) single filament	69330-02