

INSTRUCTIONS

2006-10-09

J03310

TOURING PILLION KIT

GENERAL

Kit Number

52930-05, 51898-05A, 51763-07 and 52915-07

Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of www.harley -davidson.com (English only).

NOTE

A Service Manual for the model motorcycle is available from a Harley-Davidson dealer.

Kit Contents

See Figure 1 and Table 1.

INSTALLATION

- 1. Remove stock pillion from motorcycle according to applicable Service Manual instructions.
- For FLSTN models: Remove the rear mounting bracket from the stock pillion, and save all the hardware. For all other models: Skip to Step 4.
- 3. See Figure 1. Install the rear mounting bracket (D) removed in Step 2 onto the touring pillion using the stock mounting screws (C). Tighten screws to 2.1 N·m (19 in-lbs).
- Install touring pillion (1) to double mounting studs (A) behind seat (B) by sliding the two slots in the pillion base into the grooves on the double mounting studs.
- 5. For kit 52930-05: Use the stock screw to fasten the rear seat bracket to the fender. For all other kits: Fasten the rear seat bracket to the fender using screw (6) in kit.

A WARNING

After installing seat, pull upward on seat to be sure it is locked in position. While riding, a loose seat can shift causing loss of control, which could result in death or serious injury. (00070b)

6. Install grabstrap (2) using screws (3), washers (4) and spacers (5).

SERVICE PARTS

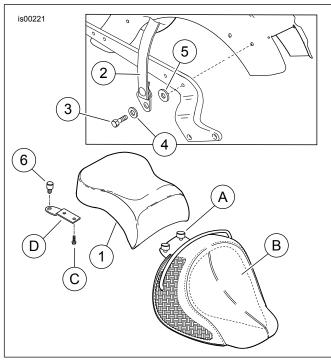


Figure 1. Service Parts: Touring Pillion Kit

Table 1. Service Parts: Touring Pillion Kit

Item	Description (Qty)	Part Numbers
1	Touring pillion	Not sold separately
2	Grab strap	51186-89B
	Screw (2)	4180
4	Washer (2)	6379W
5	Spacer (2)	6019
6	Rear mounting screw (2)	2952A
	(Not needed for Kit 52930-05)	
Items in text not in kit:		
Α	Double mounting stud (2) (stock)	
В	Seat (stock)	
С	Rear seat bracket screws (2)	
	(FLSTN only)	
D	Rear seat bracket (stock)	