



INSTRUCTIONS

J05095

2010-03-16



HARLEY-DAVIDSON DIGITAL TIRE PRESSURE GAUGE

GENERAL

Kit Number

75158-10

Models

This kit adapts to all models.

Kit Contents

This kit contains one digital tire pressure gauge with battery (66373-06).

⚠ WARNING

Do not inflate tire beyond maximum pressure as specified on sidewall. Over inflated tires can blow out, which could result in death or serious injury. (00027b)

OPERATION

Setup

1. Press and hold the button (1) until the screen flashes.
2. Release the button.
3. Immediately press and release the button repeatedly to locate the desired unit of measure (2).
4. When unit of measure is located, release the button. Screen will flash briefly and the screen light will return.

Check Tire Pressure

1. Remove valve stem cap.
2. Apply pressure gauge chuck (5) to valve stem.

NOTE

Pressure value clears on gauge when the chuck is removed from the valve stem. Press the gauge button prior to removing the chuck (5) from the valve stem to hold the value for 2 seconds.

Refer to the Owner's Manual for proper tire pressure.

3. Note tire pressure on gauge.

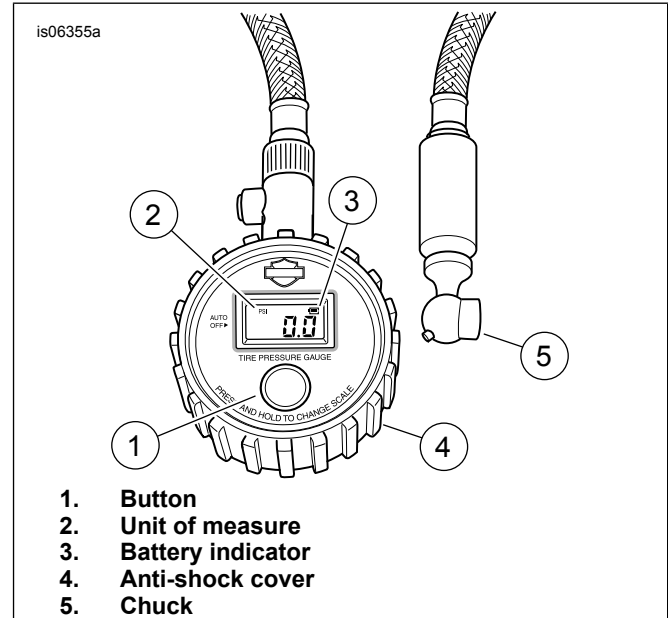


Figure 1. Digital Tire Pressure Gauge

BATTERY REPLACEMENT

When battery indicator (3) flashes or becomes dim, replace the battery.

1. Remove the anti-shock cover (4).
2. Remove the body set screw with a small phillips type screwdriver and carefully separate the body.
3. Remove the old battery and replace with a new battery (66373-06). Make sure that the positive and negative polarities are correct.
4. Replace the anti-shock cover (4).