



INSTRUCTIONS

J05473

2013-02-28



XL TANK BAG

GENERAL

Kit Number

93300040

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

This kit contains an XL tank bag, a rear strap and a rain cover.

INSTALLATION

⚠ WARNING

Improper loading of cargo or installation of accessories can affect motorcycle stability and handling, which could result in death or serious injury. (00121a)

- Keep cargo weight concentrated close to the motorcycle and as low as possible to minimize the change in the motorcycle's center of gravity. Distribute weight evenly on both sides of the vehicle. Do not load bulky items too far behind the rider or add weight to the handlebars or front forks.
- Make sure that cargo is secure and will not shift while riding. Periodically check the load.
- Make sure that the bag strap buckles are secure.
- Secure straps and keep away from wheels.
- Do not put more than 4.5 kg (10 lb) in bag.

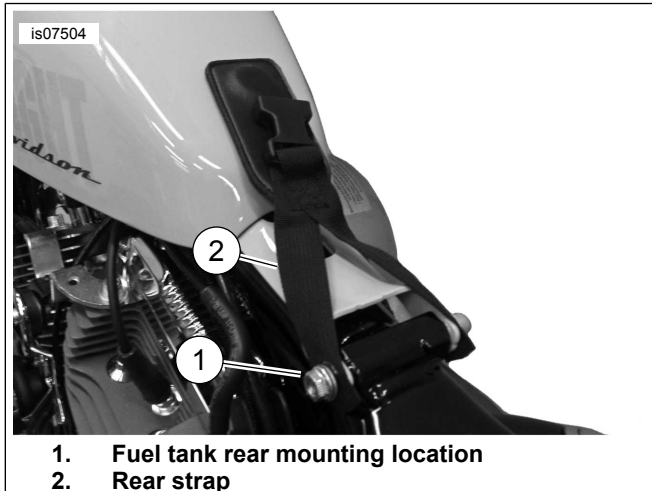


Figure 1. Rear Strap Installation

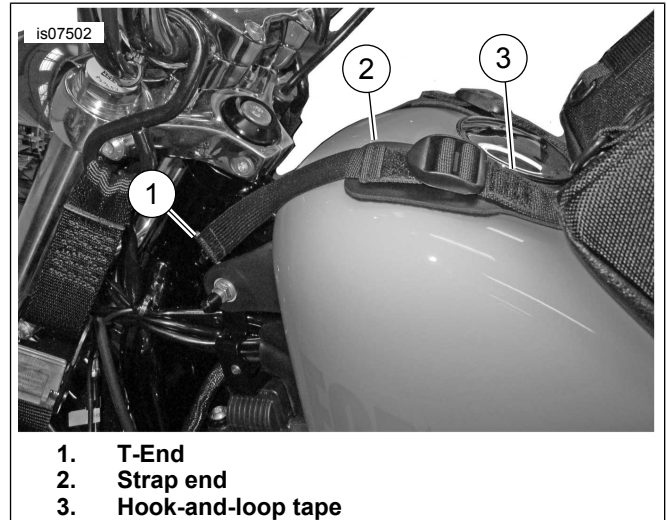


Figure 2. XL Tank Bag Front Straps

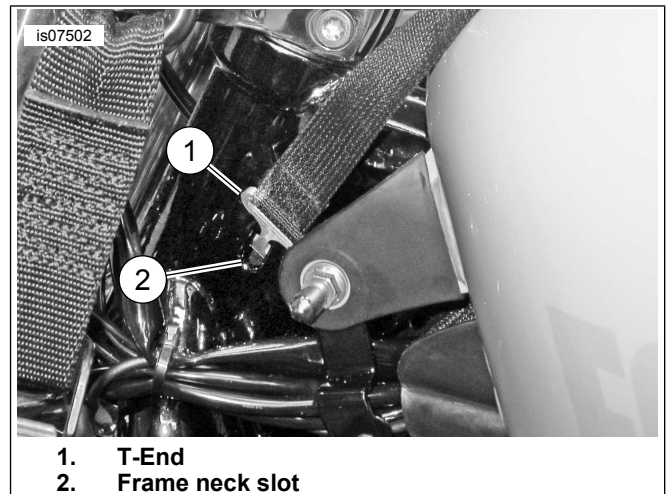


Figure 3. Frame Neck Slot

1. See the owner's manual. Remove the seat.
2. See Figure 1. Remove the rear mounting screw, washers and nut from the fuel tank rear mounting location (1).
3. Attach magnetic flap of rear strap to the fuel tank as shown.
4. Install the rear strap (2) using the screw, washers and nut from the previous step. Tighten to 20.3–27.1 N·m (15–20 ft-lbs).

NOTE

There are small pockets where the front straps connect to the tank bag, where the T-end of the strap can be stored. Place the T-end of each strap in a pocket while positioning the bag on the tank to prevent scratches.



5. See Figure 3. Secure front straps. Insert the T-end of the strap (1) into the frame neck slot (2) on the right side. Repeat for the left side strap.
 - a. Lay the bag on the tank.
 - b. Insert the T-end of the right strap (1) into the frame neck slot (2) on the right side.
 - c. Rotate the T-end to secure it in the slot.
 - d. Repeat for the left side.
6. Connect the tank bag to the rear strap. Pull the strap end to tighten the strap.
7. See Figure 2. Pull front strap ends (2) to tighten straps. Secure the strap ends to the hook-and-loop tape (3).

▲ WARNING

After installing seat, pull upward on seat to be sure it is locked in position. While riding, a loose seat can shift causing loss of control, which could result in death or serious injury. (00070b)

8. Install the seat.

Rain Cover

A rain cover is stored in the front pocket of the tank bag. To use the cover, stretch it over the XL tank bag.