



INSTRUCTIONS

J04986

2009-05-27



FLOATING REAR BRAKE ROTOR (DISC) KITS

GENERAL

Kit Number

48979-10

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Additional Parts Required

Loctite® 243 (blue)

NOTE

This instruction sheet references service manual information. A service manual for your model motorcycle is required for this installation and is available from a Harley-Davidson Dealer.

▲ WARNING

Rider and passenger safety depend upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333b)

Kit Contents

See Figure 1 and Table 1.

INSTALLATION

1. See the service manual for brake disc removal and disassembly procedures.

NOTICE

Do not re-use brake disc/rotor screws. Re-using these screws can result in torque loss and damage to brake components. (00319c)

2. See Figure 1. Assemble and install the new brake disc (1) following the instructions in the service manual. Place a few drops of Loctite 243 (blue) on the threads of the new chrome screws from the kit. Install the brake disc using **ONLY** the new chrome screws. Torque the screws to 54 N·m (40 ft-lbs).

NOTE

Avoid hard stops for the first 300 miles. Hard stops during wear-in period will gall brake discs.

SERVICE PARTS

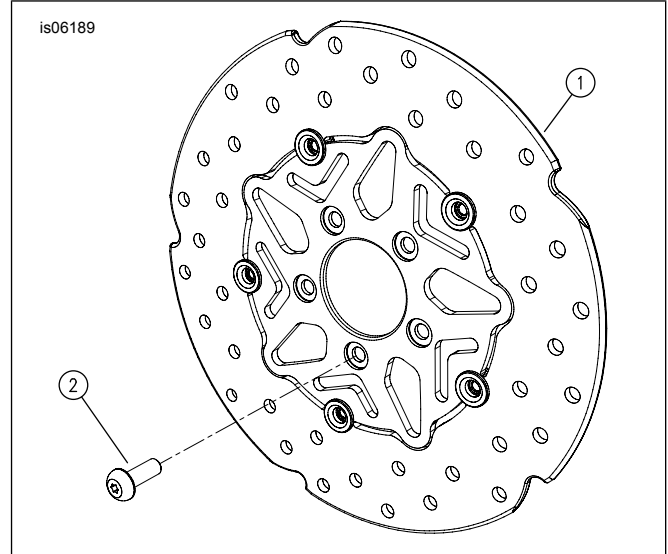


Figure 1. Service Parts: Floating Rear Brake Rotor (Disc) Kits (Stinger Style Shown)

Table 1. Service Parts: Floating Rear Brake Rotor (Disc) Kit

Item	Description (Quantity)	Part Number
Kit, Right Rear Stinger 48979-10		
1	Brake disc, rear	Not Sold Separately
2	Screw, chrome (5)	4563

