



INSTRUCTIONS

J05821

2014-09-09



WINDSHIELD MOLDING KIT

GENERAL

Kit Number

61300310, 61400325

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

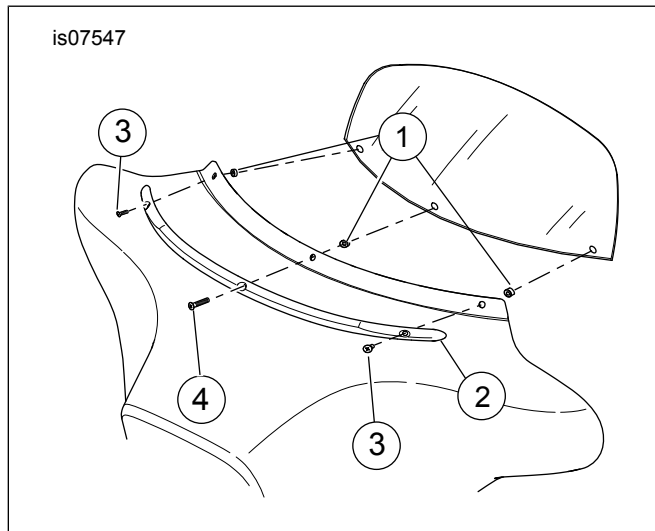


Figure 1. Service Parts: Windshield Molding Kit

Table 1. Service Parts

Item	Description (Quantity)	Part Number
1	Spacers (3)	12400076
2	Windshield molding	Not Sold Separately
3	Screws, Phillips, oval head, 1/4-20 x 3/4 inch (Chrome) (2)	10500049
	Screws, Phillips, oval head, 1/4-20 x 3/4 inch (Black) (2)	10500076
4	Screw, Phillips, oval head 1/4-20 x 2-1/4 inch (Chrome)	10500050
	Screw, Phillips, oval head 1/4-20 x 2-1/4 inch (Black)	10500077

Additional Parts Required

Separate purchase and installation of additional parts or accessories may be required for proper installation of this kit on your model motorcycle. See the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only) for a list of required parts or accessories for your model.

⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333b)

NOTE

This instruction sheet references service manual information. A service manual for your model motorcycle is required for this installation and is available from a Harley-Davidson Dealer.

INSTALLATION

1. Insert three screws from kit into countersunk holes in molding with long screw located at center of molding.
2. Slip rubber spacers from kit onto screws with countersunk end facing the molding.

NOTE

Be careful that windshield does not fall after screws are removed in step 3.

3. With a T27 Torx[®] driver, remove the three screws and washers at the bottom of the windshield. DO NOT REMOVE OUTER FAIRING.
4. Align the windshield molding with the three mounting holes and thread screws into threaded inserts in inner fairing.

NOTE

In the following step, do not exceed 30 in-lbs to avoid damage to the inner fairing.

5. Check that molding is symmetrically positioned and tighten screws to 2.8–3.3 N·m (25–30 in-lbs).