



# INSTRUCTIONS

J07058

2015-09-30



## FUEL CAP MEDALLION

### GENERAL

#### Kit Number

61300585, 61300586

#### Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of [www.harley-davidson.com](http://www.harley-davidson.com) (English only).

#### Service Parts

There are no service parts for this kit.

### INSTALLATION

- Ambient temperature should be between 21 °C (70 °F) and 38 °C (100 °F) for proper adhesion. Do not apply below 10 °C (50 °F).
  - Parts cannot be repositioned after initial adhesive installation.
  - Allow AT LEAST 24 hours after application before exposing the area to vigorous washing, strong water spray or extreme weather.
  - The adhesive bond will increase to maximum strength after about 72 hours at normal room temperature.
1. Using a 50:50 isopropyl alcohol/water solution, thoroughly clean the fuel cap surface. Allow to dry completely.
  2. With the adhesive backing still in place, test fit the medallion to the fuel cap.
  3. See Figure 1. Rotate the medallion into the desired position and place a reference mark on the medallion and on the fuel cap.

5. Align the reference marks. Install the medallion to the fuel cap.
6. Apply firm pressure across the entire medallion surface to provide a good adhesive bond.

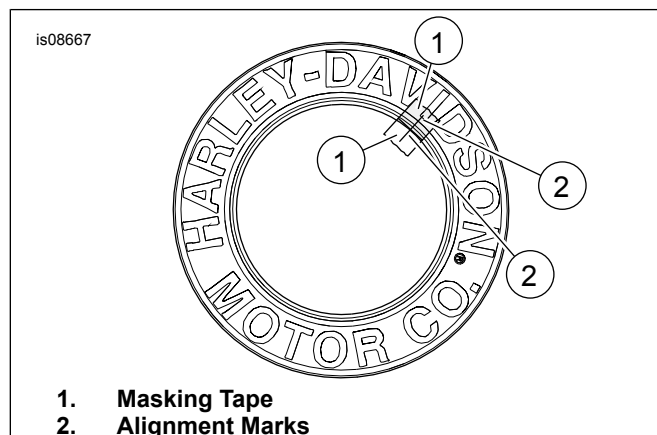


Figure 1. Fuel Cap Medallion

4. Remove the adhesive backing from the medallion.