



# INSTRUCTIONS

J06342

2018-08-20



## AIR CLEANER MEDALLION

### GENERAL

#### Kit Number

61300762, 61300928, 61300929, 61300991, 61301022

#### Models

For model fitment information, see P&A Retail Catalog or the Parts and Accessories section of [www.harley-davidson.com](http://www.harley-davidson.com) (English only).

### Installation Requirements

This kit requires the separate purchase of LOCTITE 243 MEDIUM STRENGTH THREADLOCKER AND SEALANT (BLUE) (99642-97).

#### ⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

### Kit Contents

See Figure 1 and Table 1.

### REMOVAL

1. See Figure 1 and Table 1. Remove air cleaner cover (A).

### INSTALLATION

#### Install Air Cleaner Cover and Insert.

##### NOTE

Whenever the air cleaner cover is installed, apply LOCTITE 243 MEDIUM STRENGTH THREADLOCKER AND SEALANT (BLUE) (99642-97) to the air cleaner cover screw (2).

1. Carefully remove and discard the original air cleaner cover insert (1) from air cleaner. Remove any residual adhesive on the cover with mineral spirits.
2. To verify surface cleanliness, clean the insert area with a mixture of 50/50 to 70/30 isopropyl alcohol and distilled water. Allow to dry completely.

##### NOTE

The air cleaner cover insert in this kit utilizes 3M™ Dual Lock™ Reclosable tape. This tape can be separated and pressed back together for service access to the air cleaner cover screw.

3. Peel liner from adhesive backing of air cleaner cover insert (1). Position insert over air cleaner cover (A) without touching adhesive on cover surface. Line up insert with recess in air cleaner cover.
4. Press air cleaner cover insert firmly against the cover all around, and hold pressure for 30 seconds. After releasing pressure, avoid direct contact with the insert for about 20 minutes.

##### NOTE

Allow at least 24 hours after applying the insert before exposing the area to vigorous washing, strong water spray, or extreme weather. The adhesive bond will increase to maximum strength after about 72 hours at normal room temperatures.

5. Carefully pry air cleaner insert (1) off the air cleaner cover to access the air cleaner cover mounting screw hole.
6. Assemble the air cleaner cover screw (2) securely. Tighten.  
Torque: 4.1–8 N·m (36–71 in-lbs) cover screw

### Service Parts

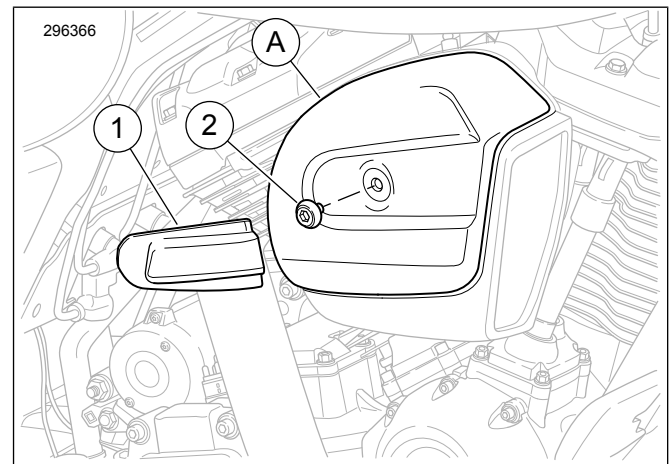


Figure 1. Screamin' Eagle Air Cleaner Medallion

Table 1. Service Parts Table

Item	Description (Quantity)	Part Number
1	A-C cover insert	Not Sold Separately
2	Air cleaner cover screw (Kit 61300762 only)	3655A
Items mentioned in text, but not included in kit:		
A	Air cleaner cover	