



INSTRUCTIONS

94100307


2022-01-19



HARLEY DAVIDSON AUDIO POWERED BY ROCKFORD FOSGATE WIRELESS HEADSET SPEAKERS

GENERAL INFORMATION

Table 1. General Information

Kits	Suggested Tools	Skill Level ⁽¹⁾
76001137	Safety Glasses, Screwdriver	 1 Dark wrench

(1) Only simple tools and techniques required

KIT CONTENTS

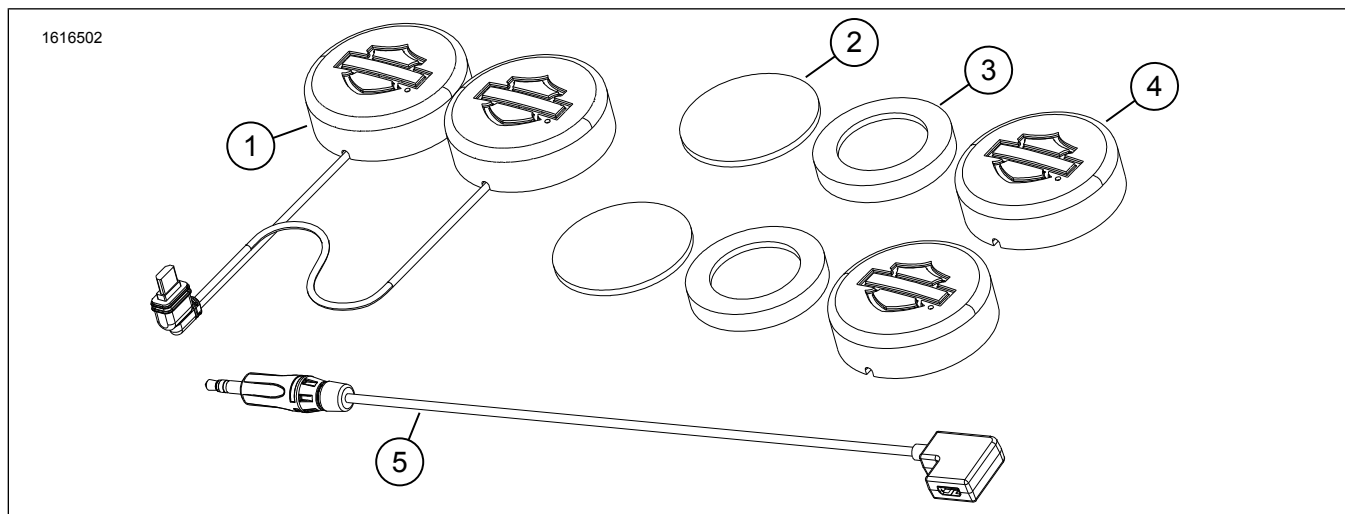


Figure 1. Kit Contents: Wireless Headset Speakers

Table 2. Kit Contents: Wireless Headset Speakers

<input checked="" type="checkbox"/>	Verify that all contents are present in the kit before installing or removing items from vehicle.				
	Item	Qty	Description	Part No.	Notes
<input type="checkbox"/>	1	1	Headset speakers	Not sold separately	
<input type="checkbox"/>	2	2	Velcro disc	Not sold separately	
<input type="checkbox"/>	3	2	Foam spacer	Not sold separately	
<input type="checkbox"/>	4	2	Foam speaker cover	76001284	
<input type="checkbox"/>	5	1	Harness adapter	69203134	

GENERAL

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

Models

For model fitment information, see the Parts and Accessories (P&A) Retail Catalog or the Parts and Accessories section of www.harley-davidson.com.

Verify that the most current version of the instruction sheet is used. It is available at: h-d.com/isheets

Installation Requirements

⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

Speaker connector fits Bluetooth wireless headset models 20S, 30K and 50S. Harness adapter will connect to other devices with 3.5mm connector.

PREPARE

1. If installed, remove wireless Bluetooth® headset and speakers from helmet.

REMOVE

1. See Figure 2. Remove screw (1).
2. Remove clamp (2) and speaker connector (3) as one assembly.
3. Remove clamp (2) from speaker connector (3).

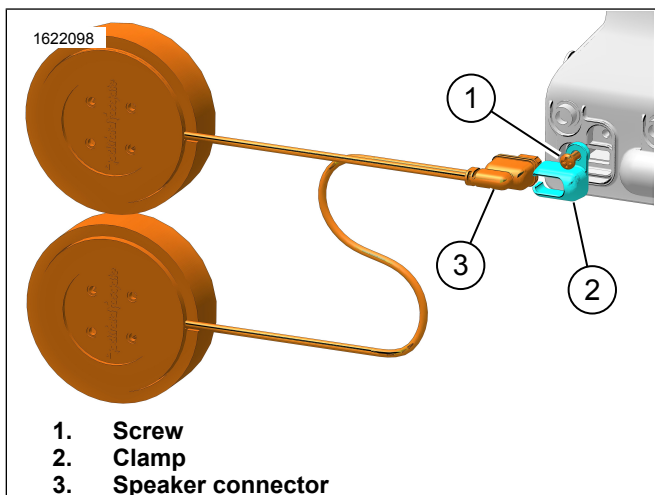


Figure 2. Disassembly

INSTALL

1. See Figure 2. Install clamp (2) to **Harley Davidson Audio Powered by Rockford Fosgate Wireless Headset** speaker connector (3).
2. See Figure 3. Install clamp (2) and speaker connector (3) as one assembly.
3. Install and tighten screw (1)

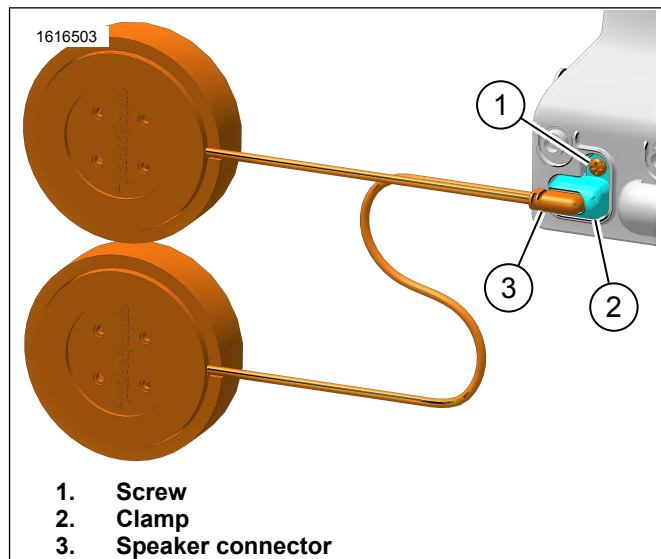


Figure 3. Speaker Assembled

COMPLETE

1. Install wireless Bluetooth® headset and speakers into helmet.
2. For firmware updates, see <http://www.harley-davidson.com>.
 - a. 20S and 30K headsets require firmware updates.
3. For App updates, see internet where apps are available.
 - a. 20S and 30K headsets require speaker setup.