



INSTRUCTIONS

94100649

2024-02-06



SEAT SUPPORT CABLE REPLACEMENT KIT

GENERAL INFORMATION

Table 1. General Information

Kit	Suggested Tools	Skill Level ⁽¹⁾
52100087	Safety Glasses, Torque Wrench	
(1) Tightening to torque value or other moderate tools and techniques required		

KIT CONTENTS

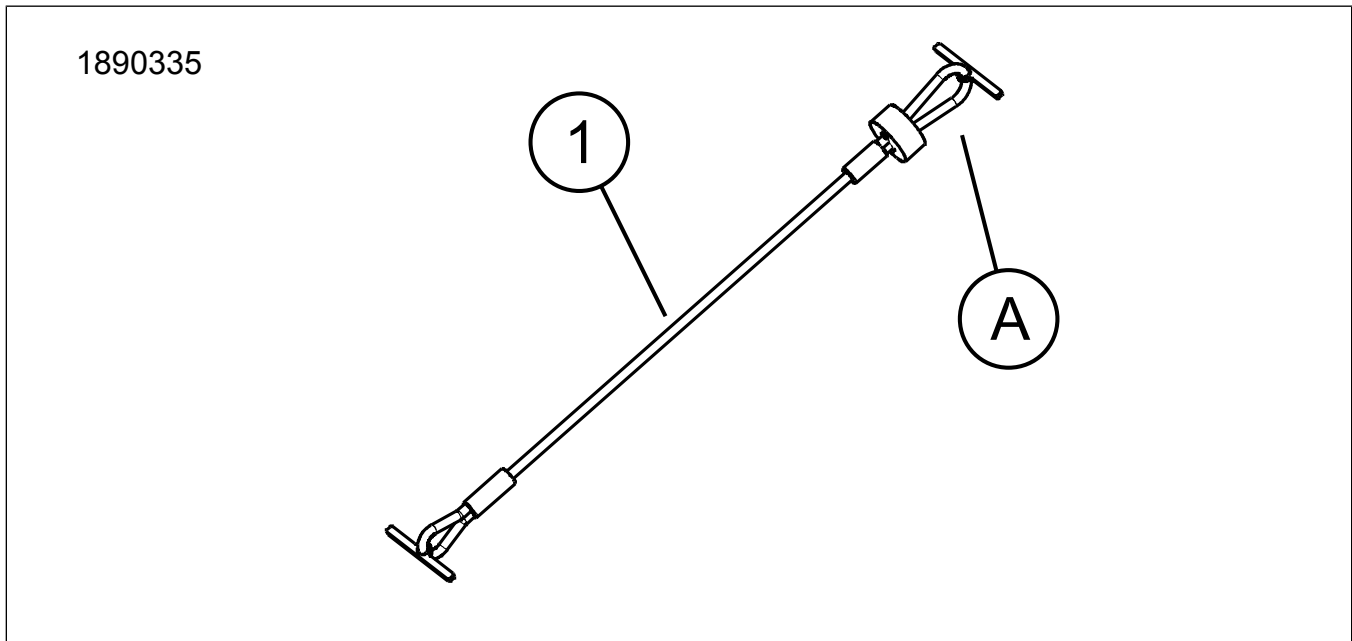


Figure 1. Kit Contents: Seat Support Cable Replacement Kit

Table 2. Kit Contents: Seat Support Cable Replacement Kit

<input checked="" type="checkbox"/>	Verify that all contents are present in the kit before installing or removing items from vehicle.				
	Item	Qty	Description	Part No.	Notes
<input type="checkbox"/>	1	1	Seat Support Cable	Not sold separately	End A goes to frame

GENERAL

Models

For model fitment information, see the Parts and Accessories (P&A) Retail Catalog or the Parts and Accessories section of www.harley-davidson.com.

Verify that the most current version of the instruction sheet is used. It is available at: h-d.com/isheets

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

Installation Requirements

⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333b)

NOTE

This instruction sheet references service manual information. A service manual for the year and model motorcycle is required for this installation and is available from:

- A Harley-Davidson dealer.
- H-D Service Information Portal, a subscription-based access available for most 2001 and newer models. For more information see *Frequently ask questions about subscriptions*.

PREPARE

1. Remove rider seat assembly. See service manual.

REMOVE

1. Place seat upside down taking care not to damage seat material.
2. See Figure 2. Remove support cable from original location (1).
 - a. See Figure 3. Cut one side of cable loop.
 - b. Remove entire cable from retainer bar. Discard cable. Note, retainer bar will remain in seat.

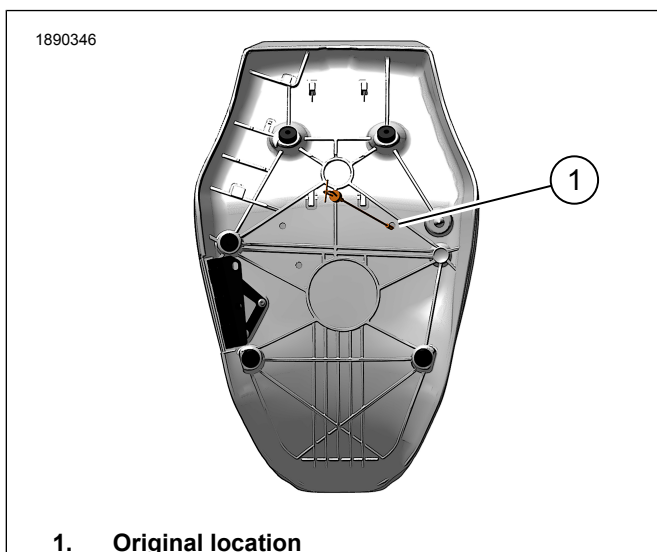


Figure 2. Original Seat Support Cable Location

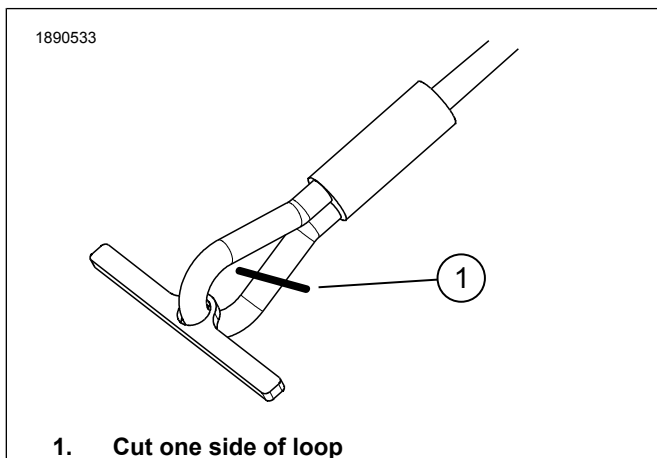


Figure 3. Seat Support Cable Cut Location

INSTALL

1. Install **NEW** support cable.
 - a. See Figure 4. Insert end of support cable (1) without grommet into new hole in seat pan.
 - b. Insert support cable retainer into hole until it can be pulled tight against inside surface of seat base.
2. Pull support cable tight to ensure retainer is positioned properly in seat base.

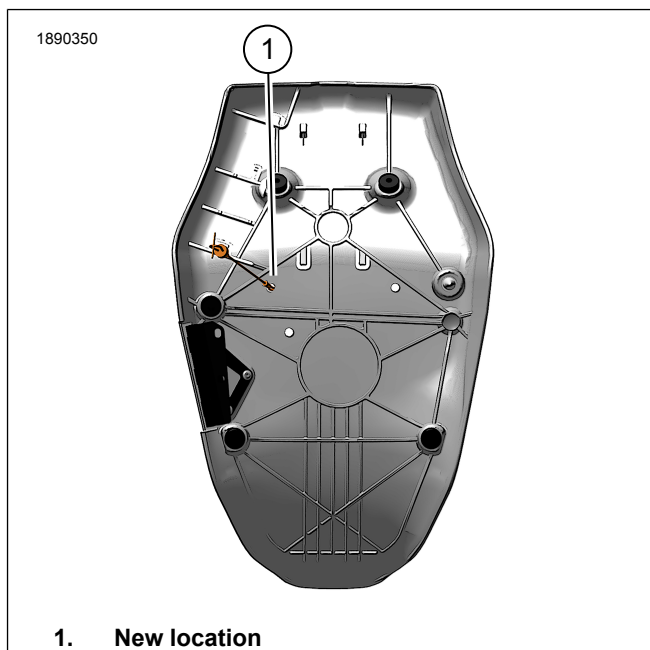


Figure 4. New Seat Support Cable Location

COMPLETE

1. Install seat. After installing seat, pull up on seat to verify that it is secure. Open seat to verify support cable function. See service manual.