



INSTRUCTIONS

94100120

2021-08-02



SUNDOWNER SOLO SEAT

GENERAL INFORMATION

Table 1. General Information

Kits	Suggested Tools	Skill Level ⁽¹⁾
52000510	Safety Glasses, Torque Wrench	
<i>(1) Tightening to torque value or other moderate tools and techniques required</i>		

KIT CONTENTS

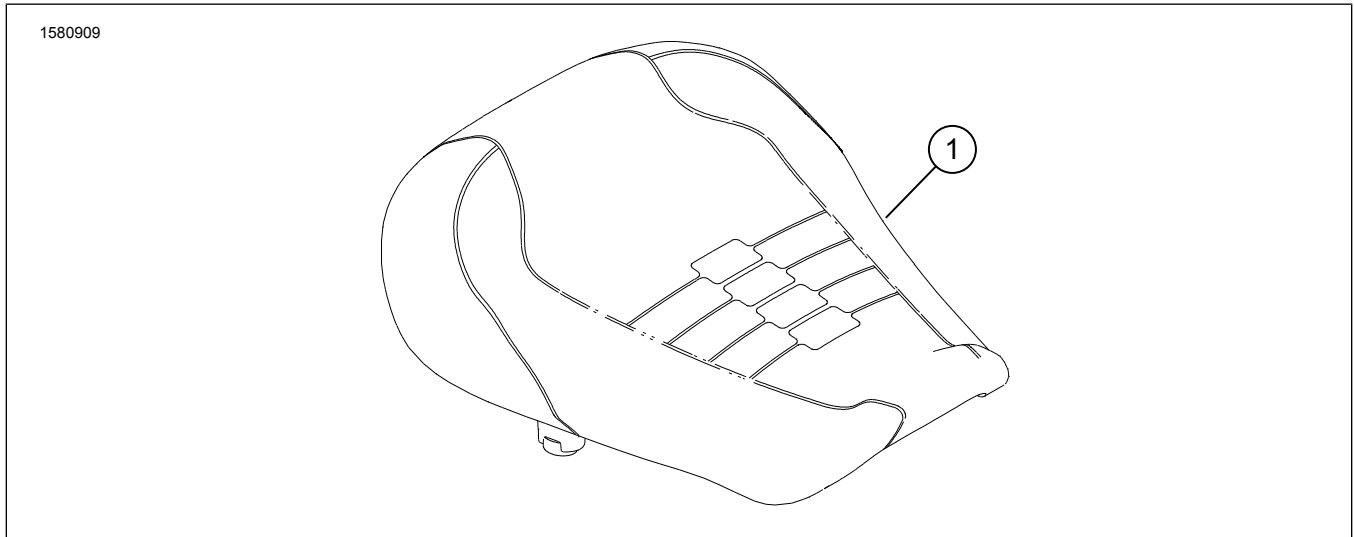


Figure 1. Kit Contents: Sundowner Solo Seat

Table 2. Kit Contents: Sundowner Solo Seat

Verify that all contents are present in the kit before installing or removing items from vehicle.					
<input checked="" type="checkbox"/>	Item	Qty	Description	Part No.	Notes
<input type="checkbox"/>	1	1	Sundowner solo seat	Not sold separately	

GENERAL

Models

For model fitment information, see the Parts and Accessories (P&A) Retail Catalog or the Parts and Accessories section of www.harley-davidson.com.

Verify that the most current version of the instruction sheet is used. It is available at: h-d.com/isheets

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

Installation Requirements

⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

NOTE

This instruction sheet references service manual information. A service manual for the year and model motorcycle is required for this installation and is available from:

- A Harley-Davidson dealer.

- *H-D Service Information Portal, a subscription-based access available for most 2001 and newer models. For more information see Frequently ask questions about subscriptions.*

REMOVE

1. Remove OE seat. See service manual.

INSTALL

1. Figure 2 Insert half moon cutouts (1) to vehicle frame crossover tube (5).
 - a. Make sure to align and insert tabs (4) into seat slots (2).
2. Rotate seat down.

NOTE

The key may need to be used to lock seat into place.

3. Lock seat post into seat latch (3).

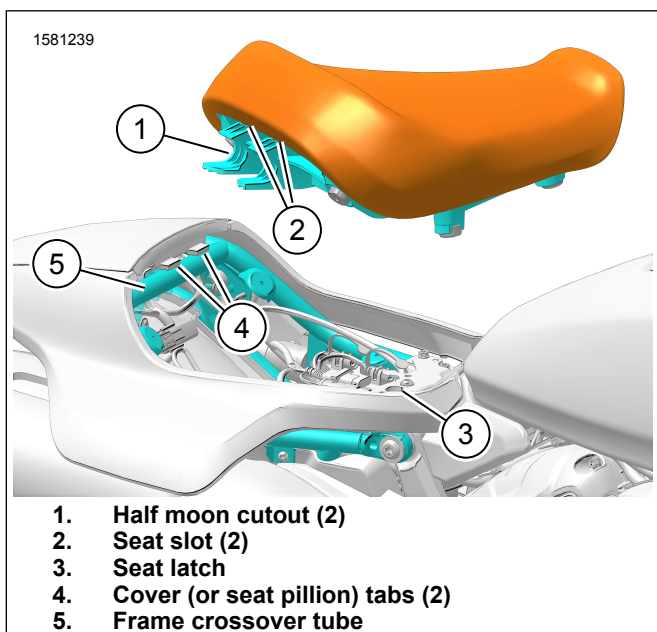


Figure 2. Seat Installation

COMPLETE

1. After installing seat, pull upward on seat to be sure it is locked in position.