



# INSTRUCTIONS

94100307

2022-01-19



## HARLEY DAVIDSON AUDIO POWERED BY ROCKFORD FOSGATE WIRELESS HEADSET SPEAKERS

### GENERAL INFORMATION

Table 1. General Information

Kits	Suggested Tools	Skill Level <sup>(1)</sup>
76001137	Safety Glasses, Screwdriver	 1 Dark wrench
<i>(1) Only simple tools and techniques required</i>		

### KIT CONTENTS

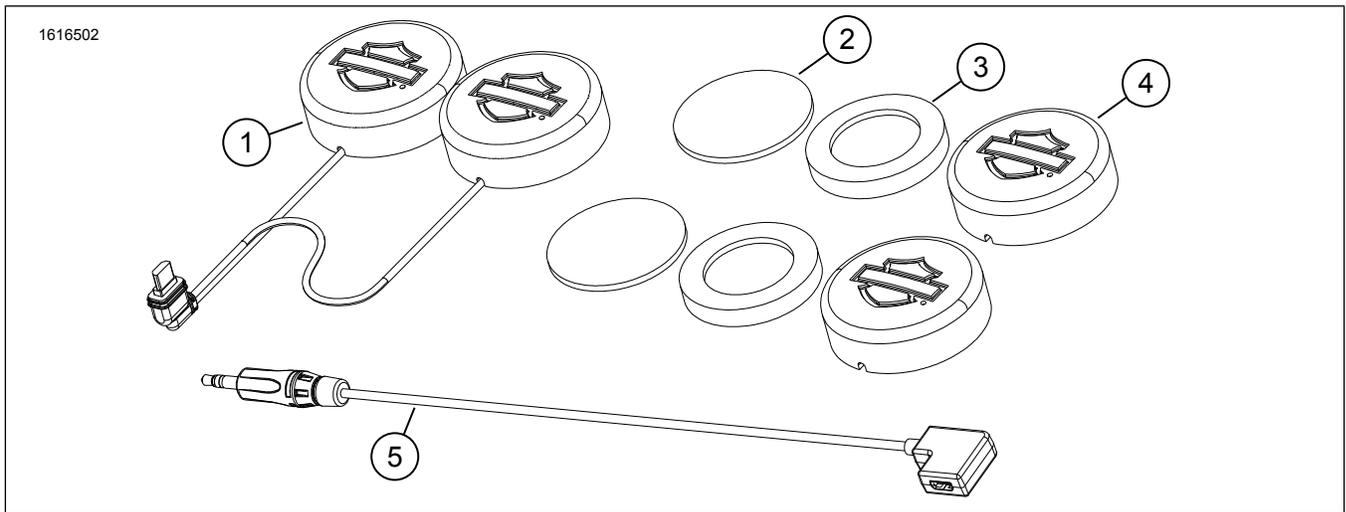


Figure 1. Kit Contents: Wireless Headset Speakers

Table 2. Kit Contents: Wireless Headset Speakers

Verify that all contents are present in the kit before installing or removing items from vehicle.					
<input checked="" type="checkbox"/>	Item	Qty	Description	Part No.	Notes
<input type="checkbox"/>	1	1	Headset speakers	Not sold separately	
<input type="checkbox"/>	2	2	Velcro disc	Not sold separately	
<input type="checkbox"/>	3	2	Foam spacer	Not sold separately	
<input type="checkbox"/>	4	2	Foam speaker cover	76001284	
<input type="checkbox"/>	5	1	Harness adapter	69203134	

### GENERAL

#### Models

For model fitment information, see the Parts and Accessories (P&A) Retail Catalog or the Parts and Accessories section of [www.harley-davidson.com](http://www.harley-davidson.com).

Verify that the most current version of the instruction sheet is used. It is available at: [h-d.com/isheets](http://h-d.com/isheets)

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

## Installation Requirements

### ⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

Speaker connector fits Bluetooth wireless headset models 20S, 30K and 50S. Harness adapter will connect to other devices with 3.5mm connector.

## PREPARE

1. If installed, remove wireless Bluetooth® headset and speakers from helmet.

## REMOVE

1. Figure 2 Remove screw (1).
2. Remove clamp (2) and speaker connector (3) as one assembly.
3. Remove clamp (2) from speaker connector (3).

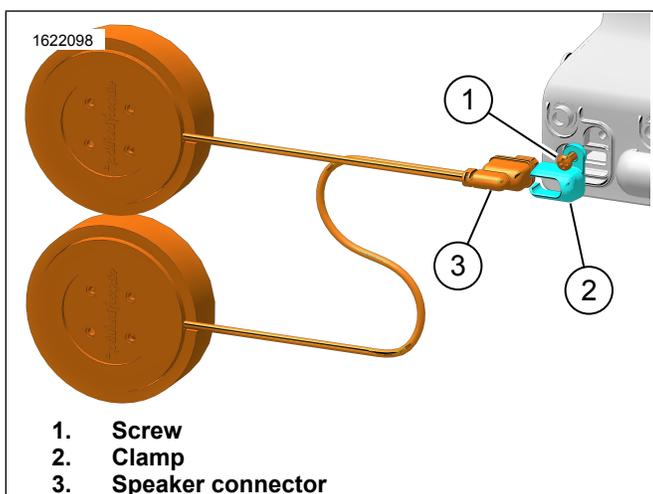


Figure 2. Disassembly

## INSTALL

1. Figure 2 Install clamp (2) to **Harley Davidson Audio Powered by Rockford Fosgate Wireless Headset** speaker connector (3).
2. Figure 3 Install clamp (2) and speaker connector (3) as one assembly.
3. Install and tighten screw (1)

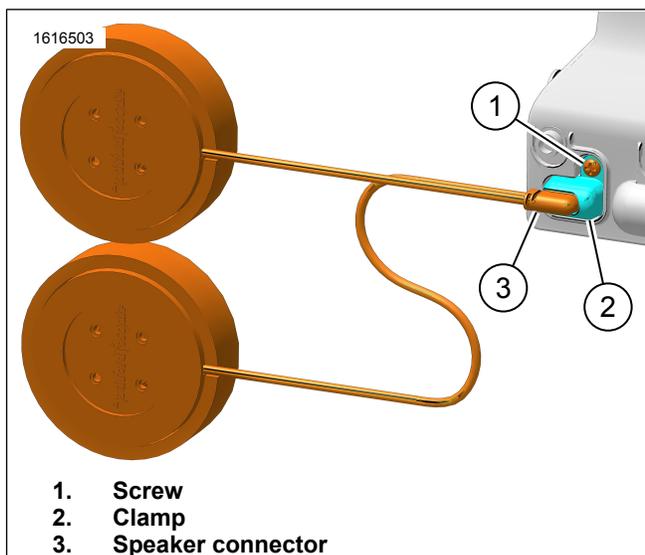


Figure 3. Speaker Assembled

## COMPLETE

1. Install wireless Bluetooth® headset and speakers into helmet.
2. For firmware updates, see <http://www.harley-davidson.com>.
  - a. 20S and 30K headsets require firmware updates.
3. For App updates, see internet where apps are available.
  - a. 20S and 30K headsets require speaker setup.