INSTRUCTIONS

2024-01-23



SHIFTER PEG KIT

GENERAL INFORMATION

J03166

Table 1. General Information

Kits	Suggested Tools	Skill Level ⁽¹⁾		
33946-05, 33600008, 33600075, 33600154, 33600256, 33600257, 33600295, 33600303, 33600357, 33600383, 33600384, 33600411, 33600412	Safety Glasses, Torque Wrench	ppp		
(1) Tightening to torque value or other moderate tools and techniques required				

KIT CONTENTS

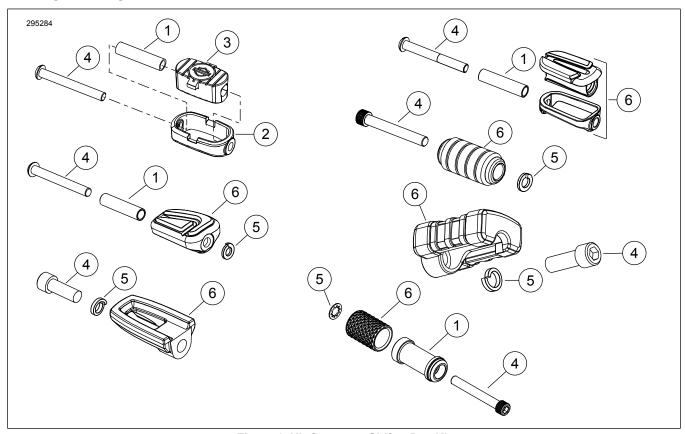


Figure 1. Kit Contents: Shifter Peg Kit

Table 2. Kit Contents: Shifter Peg Kit

	r removing items from vehicle.				
	Item	Qty	Description	Part No.	Notes
				50784-07	Kit 33946-05
	1	1	Spacer	Not sold separately	Kit 33600383, 33600384
	2	1	Cover	33947-05	Kit 33946-05
	3	1	Tread	Not sold separately	Kit 33946-05
				10200594	Kit 33946-05
				94545-03	Kit 33600008
	4	1	Screw	4196	Kit 33600075
				10500108	Kits 33600256, 33600383
				10500107	Kits 33600257, 33600384, 33600411, 33600412
				10201005	Kits 33600295, 33600303, 33600357
				10200853	Kit 33600154
	5	1	Lockwasher	7041	Kits 33600075, 33600154, 33600256
				7042	Kits 33600295, 33600303
				10300230	Kit 33600357
				7127	Kit 33600383
				7155	Kits 33600257, 33600384
	6		Shifter peg assembly	33600007	Kit 33600008
		1		33600056	Kit 33600075
				33600098	Kit 33600154
				33600251	Kit 33600256
				33600244	Kit 33600257
				Not sold separately	Kits 33600295, 33600303
				33600369	Kit 33600357
				Not sold separately	Kits 33600383, 33600384

GENERAL

Models

For model fitment information, see the Parts and Accessories (P&A) Retail Catalog or the Parts and Accessories section of www.harley-davidson.com.

Verify that the most current version of the instruction sheet is used. It is available at: h-d.com/isheets

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

2/3 J03166

Installation Requirements

▲ WARNING

Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

REMOVE

1. Remove existing shifter peg.

INSTALL

- Kits 33946-05, 33600008: Assemble shifter peg, if necessary.
 - a. Insert spacer tube (1) in tread (3).
 - b. Install tread with spacer tube insert into chrome cover (2).
 - c. Verify that the tread is oriented properly.
- 2. Kits 33946-05, 33600008:
 - Install shifter peg assembly (6) and screw (4) to shift lever. Do not tighten.
- 3. Kits 33600075, 33600154, 33600256, 33600257, 33600295, 33600303, 33600357:
 - Install shifter peg assembly (6), screw (4) and washer
 (5).
 - b. Position washer between shifter peg and shift lever. Do not tighten.
- 4. **Kits 33600294, 33600303:** Place washer under bolt head.
- 5. Rotate shifter peg (6) to desired orientation.
- 6. Tighten screw (4).

Torque: 16.3-18.9 N·m (144-167 in-lbs)

J03166 3/3