



INSTRUCTIONS

J06711

2019-01-15



FXDRS RIDER SEAT KITS

GENERAL

Kit Number

52000390, 52000398, 52000399

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

See Table 1 and Figure 1.

INSTALLATION

⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

NOTE

When a solo seat is installed without a passenger seat, the passenger foot pegs or foot boards and the passenger grab strap must be removed.

1. Remove cowl cover and seat. See Owner's Manual.

2. Retain Original Equipment (OE) hardware screws for installation of **new** seat.
3. Install **new** seat, inserting the tongue at front of seat into the channel into frame. See Owner's Manual.
4. Install screws (1). Tighten.
Torque: 10–12 N·m (7–9 ft-lbs)
5. After installing seat, pull up on the seat to verify that it is secure. See Owner's Manual.

SERVICE PARTS

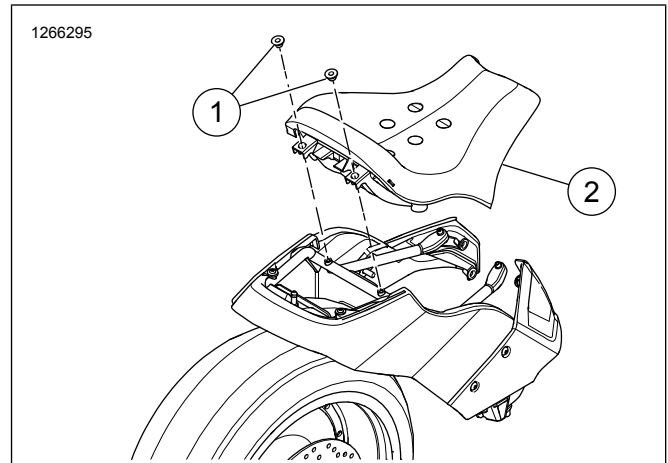


Figure 1. Service Parts: FXDRS Rider Seat

Table 1. Service Parts: FXDRS Rider Seat Kits

Item	Description (Quantity)	Part Number
1	Screw (2)	3909
2	Solo seat	Not Sold Separately