



INSTRUCTIONS

J00631

2018-12-20



DETACHABLE PASSENGER SEAT HARDWARE KIT

Table 1. General Information

Kits	Suggested Tools	Skill Level ⁽¹⁾	Time
51676-97A	Safety Glasses, Phillip Screw Driver		15 minutes

(1) Only simple tools and techniques required

KIT CONTENTS

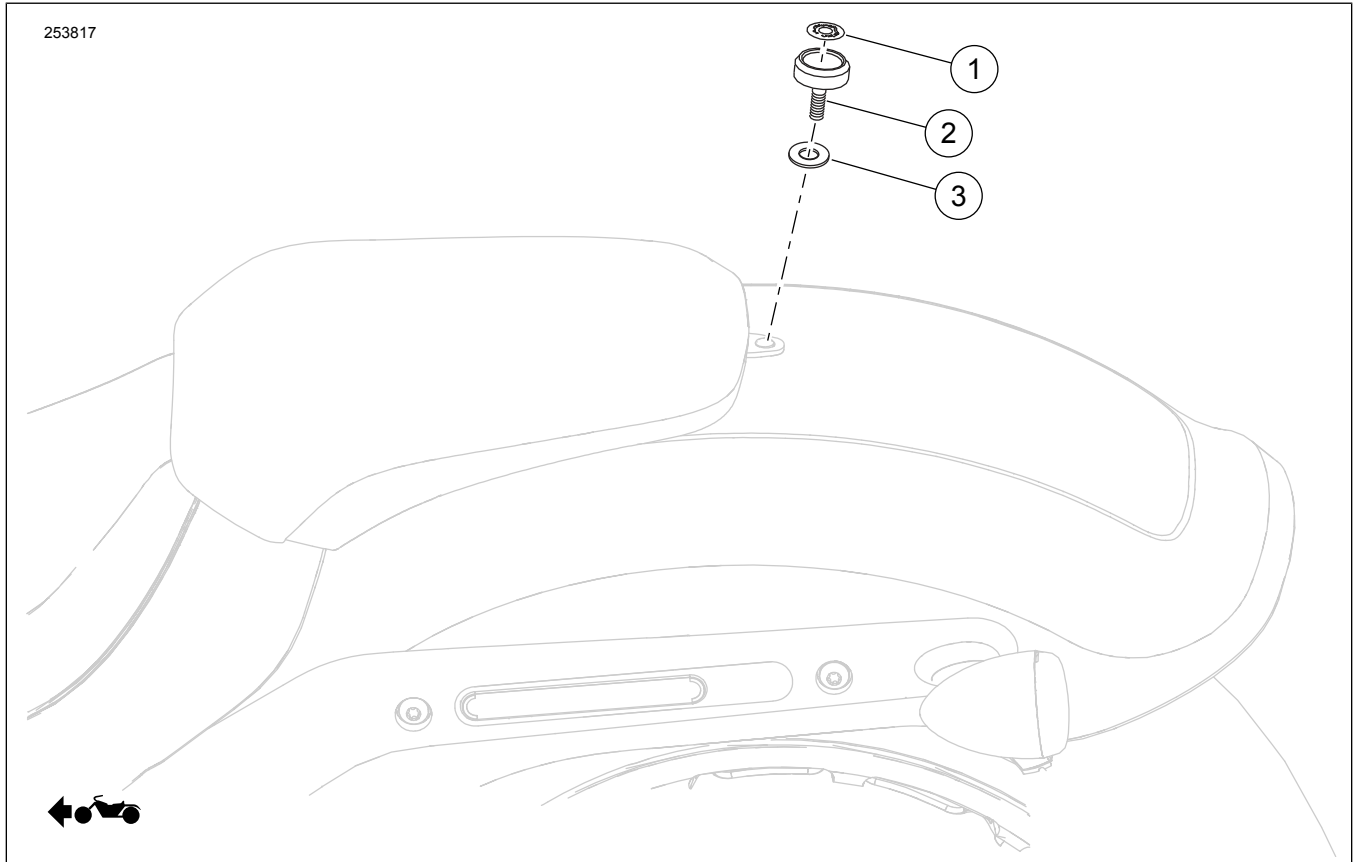


Figure 1. Kit Contents: Rider Backrest Components

Table 2. Kit Contents: Rider Backrest Components

<input checked="" type="checkbox"/>	Item	Qty	Description	Part No.	Notes
<input type="checkbox"/>	1	1	H-D emblem	14628-96	
<input type="checkbox"/>	2	1	Knob, knurled, 1/4-20	Not sold separately	
<input type="checkbox"/>	3	1	Flat, washer, nylon	6441	

NOTE

Verify all contents are present in the kit before installing or removing items from vehicle.

GENERAL

Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Ensure you are using the most current version of the instruction sheet which is available at: www.harley-davidson.com/isheets

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

Installation Requirements

⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

INSTALL

1. See Figure 2. Remove and discard screw from rear seat bracket.
2. Slide nylon washer over threaded portion of knurled knob.
3. Install knurled knob with nylon washer into threaded fender hole to secure rear of seat. Tighten with fingers only.
4. See Figure 1. Remove backing paper from H-D emblem (1) and install emblem on top of knurled knob (2).
5. Pull up on the seat to verify that it is secure.

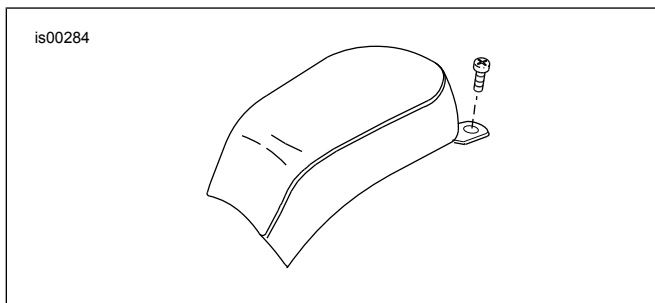


Figure 2. Remove Screw