



INSTRUCTIONS

J01625

2013-11-01



2-UP SPORT RACK

GENERAL

Kit Numbers

53711-96A, 53852-00

Models

For model fitment information, see the P&A retail catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

NOTE

1996 and later FXD/FXDL models with rigid mount sideplates require spacer kit Part No. 53828-00 to complete installation.

NOTE

Models with rigid mount sideplates require spacer kit 53828-00 to complete installation.

- 1990 and later XL model motorcycles with detachable sideplates
- 1982 and later XL model motorcycles with rigid mount sideplates
- 1994 and later FXDS-CONV model motorcycles with rigid mount sideplates
- 1982 through 1994 FXR models with rigid sideplates except FXRS-CONV and FXRT.
- 1999 and later FXDX models (Kit No. 53852-00 only).

NOTE

Model years 1994 and later FXDS-CONV motorcycles with original equipment side plates require spacer kit Part No. 53828-00 to complete installation.

⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

⚠ WARNING

Do not exceed luggage rack weight capacity. Too much weight can cause loss of control, which could result in death or serious injury. (00373a)

Kit Contents

Table 1. Kit Contents Nos. 53711-96A and 53852-00

Quantity	Description	Part Number
4	Screws, hex socket, 1/4-28 x 1-3/8 in.	944
4	Locknuts, 1/4-28 in.	7682
1	Luggage rack	Not sold separately

Table 2. Kit Contents No. 53828-00

Quantity	Description	Part Number
2	Spacer	53826-00
4	Button head cap screws	94264-00

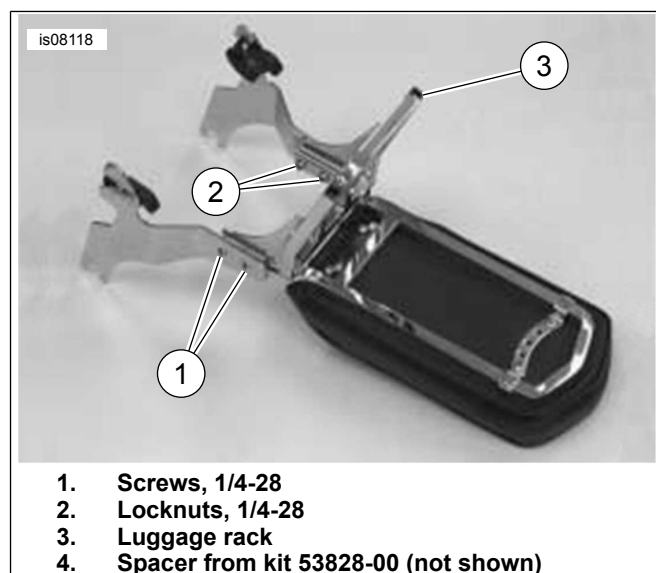


Figure 1. Luggage Rack (shown with detachable sideplates)

INSTALLATION

1. Remove and discard the screws securing sissy bar to sissy bar sideplates.
2. For all models listed earlier, except for FXDS-CONV, proceed as follows:
 - a. See Figure 1. Position luggage rack (3) between sideplates of sissy bar assembly.
 - b. Thread 1/4-28 x 1-3/8 in. screws (1) through holes in sissy bar sideplate, sissy bar and luggage rack support.
 - c. Retain with 1/4-28 in. locknuts (2).
3. For 1994 and later FXDS-CONV, proceed as follows:
 - a. Position luggage rack between sissy bar assembly sideplates.

- b. Position spacers, from kit 53828-00, between sissy bar and luggage rack. To aid in installation, align and retain clearance hole, spacer and rack during screw installation.
 - c. Thread 1/4-28 x 1-1/2 in screws, from kit 53828-00, through holes in sideplate, sissy bar, spacer and luggage rack. Retain with 1/4-28 locknuts provided with rack (2).
4. Tighten hardware installed in steps 2 and 3.