



INSTRUCTIONS





J06750

2019-08-21



TANK STRAP

Table 1. General Information

Kits	Suggested Tools	Skill Level ⁽¹⁾	Time
61301076	Safety Glasses, Isopropyl alcohol	   	1 hour

(1) Only simple tools and techniques required

KIT CONTENTS

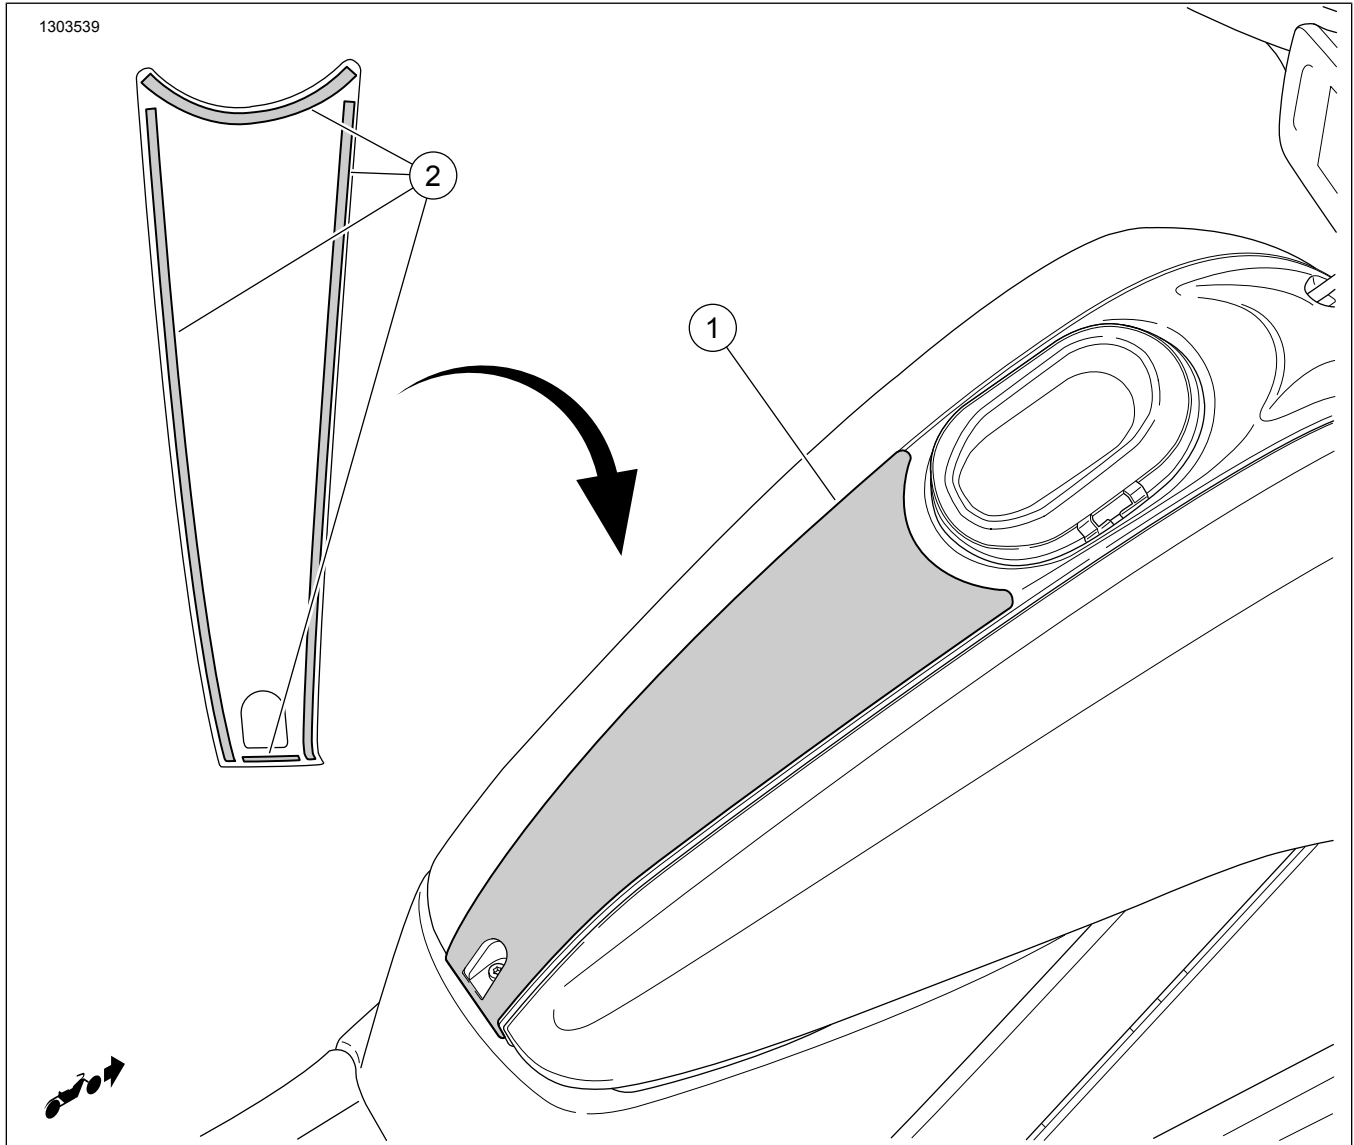


Figure 1. Kit Contents: Tank Strap

Table 2. Kit Contents: Tank Strap

<input checked="" type="checkbox"/>	Item	Qty	Description	Part No.	Notes
<input type="checkbox"/>	1		Tank Strap	Not sold separately	

NOTE

Verify all contents are present in the kit before installing or removing items from vehicle.

GENERAL

Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Ensure you are using the most current version of the instruction sheet which is available at: www.harley-davidson.com/isheets

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

Installation Requirements

▲ WARNING

Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

INSTALL

NOTE

Install panels when ambient temperature is 16 °C (61 °F) or above.

1. See Figure 1. Thoroughly clean area with a 50:50 mix of isopropyl alcohol and water. Allow to dry completely.
2. Remove tape protecting the adhesive pads (2) on the inside of the tank strap.
3. Figure 2 Install tank strap to tank.
 - a. Start at base of tank.
 - b. Continue working up the tank.
4. Press firmly on top surface of cover.
5. Hold for 30 seconds.

NOTE

Wait 24 hours before exposure to water, temperature change or operating vehicle. Adhesive will fully cure after 72 hours at room temperature.

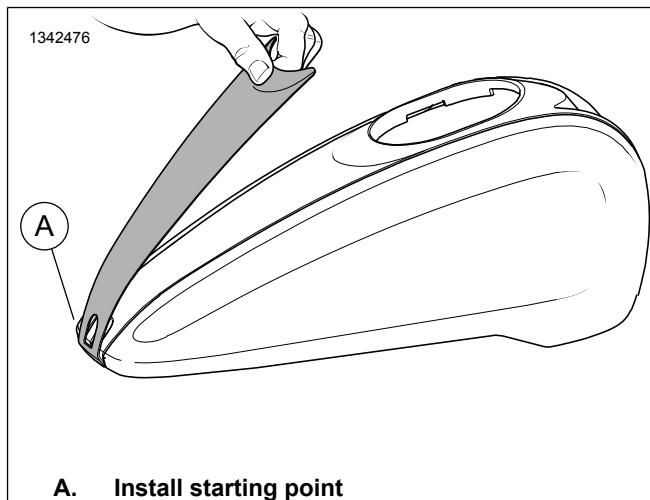


Figure 2. Tank Strap Installation