



INSTRUCTIONS

J06767

2019-08-21



FXDRS COSMETIC GAUGE REPLACEMENT DECORATIVE PIECE

Table 1.

Kits	Suggested Tools	Skill Level	Time
61301141	Safety Glasses, Torque Wrench	1	1 hour
<i>(1) Tightening to torque value or other moderate tools and techniques required</i>			

KIT CONTENTS

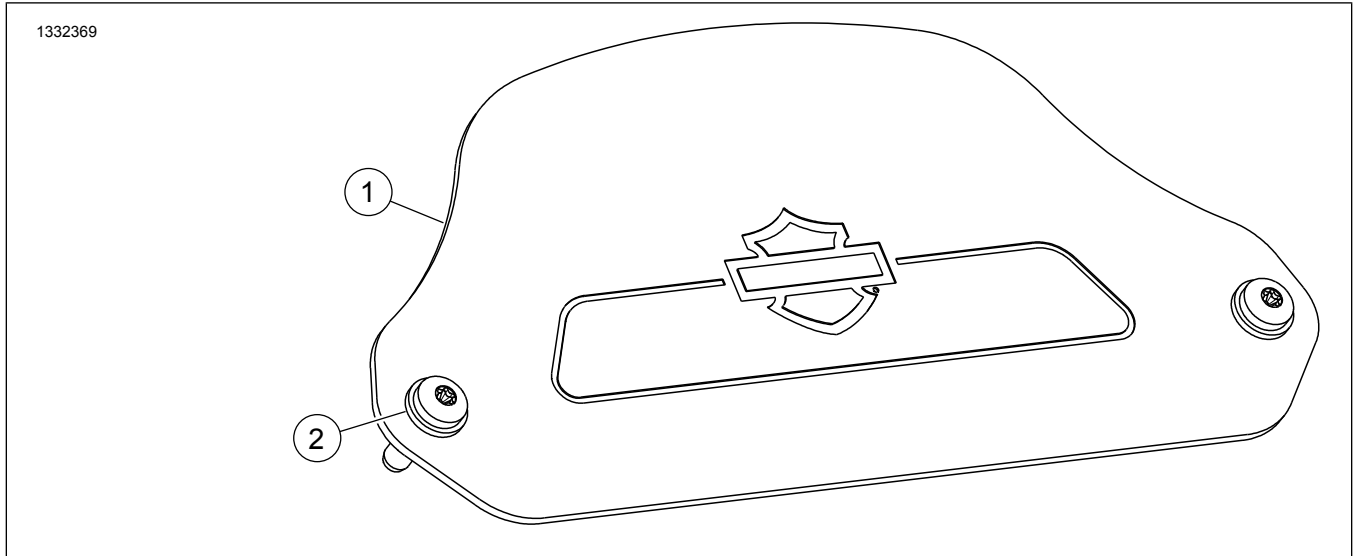


Figure 1. Service Parts: FXDRS Cosmetic Gauge Cover

Table 2. Service Parts List: Rider Backrest Components

<input checked="" type="checkbox"/>	Item	Qty	Description	Part No.	Notes
<input type="checkbox"/>	1	1	FXDRS Cosmetic gauge cover	Not sold separately	
<input type="checkbox"/>	2	2	Screw, T15	10200065	1.4–1.9 N·m (12–17 in-lbs)

GENERAL

NOTE

Verify all contents are present in the kit before installing or removing items from vehicle.

Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Make sure you are using the most current version of the instruction sheet which is available at: <https://h-d.com/isheets>

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

Installation Requirements

⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

Separate purchase: Riser top clamp.

INSTALL

1. NOTE

Keep the instrument module to be mounted in a **separately purchased** riser top clamp.

Remove FXDRS dash panel cover and instrument module.
See service manual.

2. Install cosmetic gauge cover (1) in place of the OEM dash panel cover.
3. Install screws (2). Tighten.
Torque: 1.4–1.9 N·m (12–17 **in-lbs**) *Cosmetic gauge cover screw*