



INSTRUCTIONS

J04931

2020-03-04



BOOM! AUDIO HALF HELMET MUSIC AND COMMUNICATIONS HEADSET

GENERAL

NOTE

Some local governments prohibit or restrict the use of headset speakers. Check with local authorities and obey all applicable laws and regulations.

Kit Number

76572-09

Models

The headset in this kit **cannot** be used with open face or full face helmets.

For sound system fitment information, see the Parts and Accessories (P&A) retail catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

For 2006-2009 models with radio software versions prior to ST10 v8.21.0 and TMS320 v8.19.0, it may be desirable to update the software to get more VOX (voice-activated) microphone adjustment at the upper settings.

For the latest software, see a Harley-Davidson dealer or visit www.harley-davidson.com to download a copy to your computer and write/burn a CD.

NOTE

Since the material that will be written to the CD is data, a record speed of 8X or slower must be used.

To download a copy of the software to your computer:

- On www.H-D.com/infotainment-support, search for the phrase "Advanced Audio Software".
- Scroll down to the "H-D Advanced Audio by Harmon/Kardon®" link.
- In the pop-up window, select and highlight the "Software Download" tab at the top.
- Follow the do-it-yourself instructions to determine your current software version and perform the update if necessary.

Kit Contents

See Figure 2 and Table 1.

OPERATION

1. Plug in the coiled audio cable at the headset and audio source.

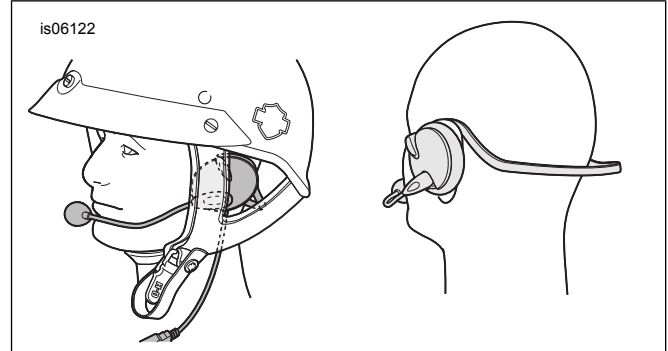


Figure 1. Headset and Microphone Positioning

2. See Figure 1. Put the headset on as shown, with the neck bow across the **back** of the head, above the neck.
3. Put the helmet on, with the strap passing **over** the headset and microphone boom. Fasten securely. After putting the helmet on, position the boom with the microphone lightly touching or directly to the left of the lips.

NOTE

The white dot painted on the microphone boom must face toward the mouth of the wearer.

4. Attach the clothing clip to the audio cable, and clip to clothing as desired to secure.

NOTICE

Do not pull on the cord to remove the headset from the socket. Pull on the headset jack to disconnect the headset from the socket. (00174a)

5. Detach the audio cable from the audio source, clothing and headset, and store when not in use.

▲ WARNING

Do not select a volume level that blocks out traffic noise or interrupts the concentration necessary for safe operation of the motorcycle. Distractions or a volume level that blocks out traffic noise could cause loss of control resulting in death or serious injury. (00539b)



SERVICE PARTS

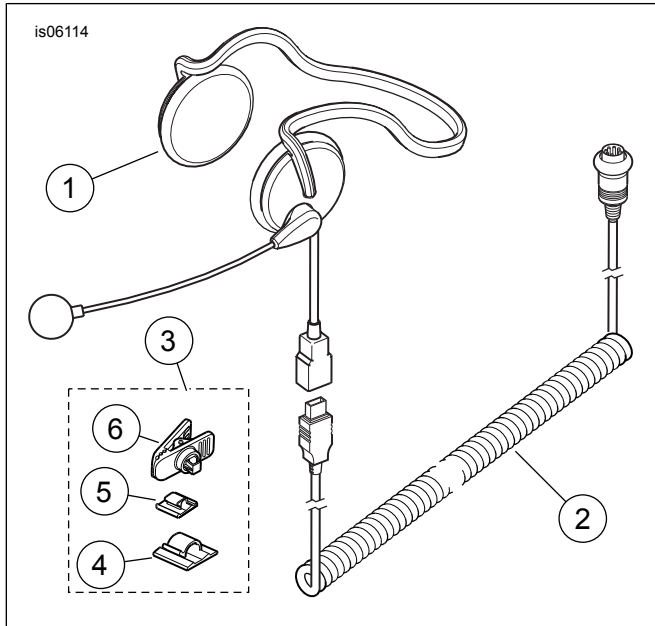


Figure 2. Service Parts, Half Helmet Music and Communications Headset

Table 1. Service Parts

Item	Description (Quantity)	Part Number
1	Headset/microphone assembly	Not sold separately
2	Headset cord	76574-09
3	Hardware kit (includes items 4-6)	Not sold separately
4	* Clip, nylon, adhesive back 9.5 mm (3/8 in)	Not sold separately
5	* Clip, nylon, adhesive back 4.8 mm (3/16 in)	10271
6	* Clothing clip, stereo headset	Not sold separately