



INSTRUCTIONS

94100626

2025-01-23



SHORT WINDSHIELD MOUNTING KIT

GENERAL INFORMATION

Table 1. General Information

Kits	Suggested Tools	Skill Level ⁽¹⁾
57400687	Safety Glasses, Torque Wrench	
(1) Tightening to torque value or other moderate tools and techniques required		

KIT CONTENTS

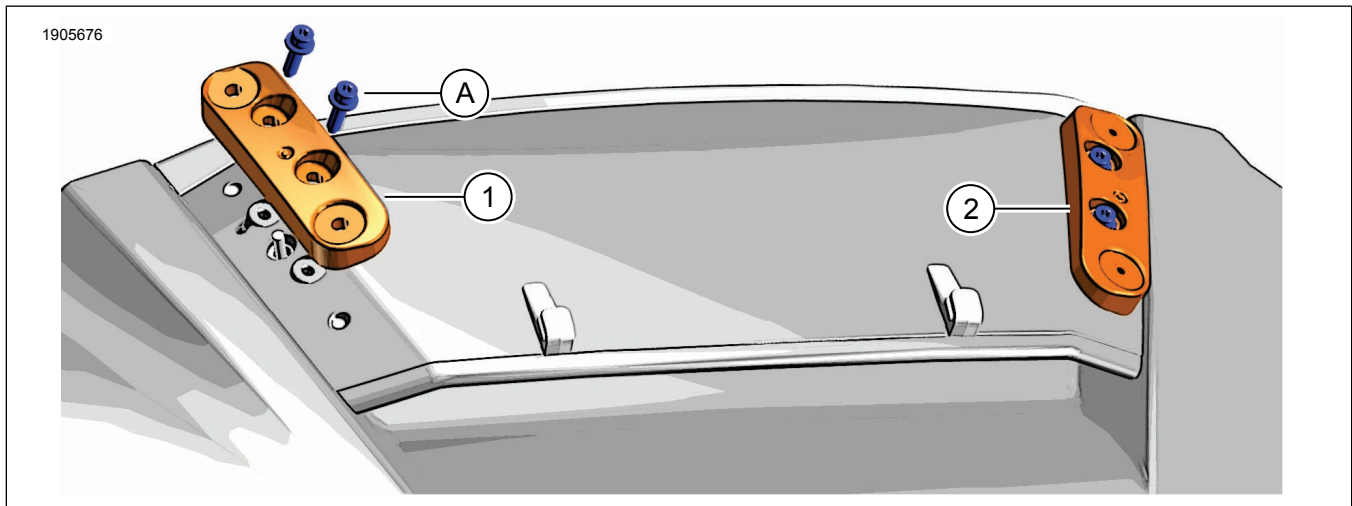


Figure 1. Kit Contents: Short Mount Windshield Mount

Table 2. Kit Contents: Short Mount Windshield Mount Kit

Verify that all contents are present in the kit before installing or removing items from vehicle.					
<input checked="" type="checkbox"/>	Item	Qty	Description	Part No.	Notes
<input type="checkbox"/>	1	1	Short windshield mounting block, right	Not sold separately	
<input type="checkbox"/>	2	1	Short windshield mounting block, left	Not sold separately	
Items mentioned in text, but not included in kit					
<input checked="" type="checkbox"/>	A	4	Original Equipment (OE) screw		

GENERAL

Instruction sheet is also available electronically. To verify you are using the most current version available, do one of the following:

- Go to h-d.com/isheets
- Scan QR code in upper left corner of the instruction sheet

NOTE

This instruction sheet **may have a Supplemental Video** to assist installer in clarifying a certain part of the assembly. A linked video would be located at the end of this instruction sheet.

Models

For model fitment information, see the Parts and Accessories (P&A) Retail Catalog or the Parts and Accessories section of www.harley-davidson.com.

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

Installation Requirements

These items are available at your local Harley-Davidson dealership:

- Separate purchase of Short Windshield kit is required.

⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333b)

NOTE

This instruction sheet references service manual information. A service manual for the year and model motorcycle is required for this installation and is available from:

- A Harley-Davidson dealer.
- H-D Service Information Portal, a subscription-based access available for most 2001 and newer models. For more information see *Frequently ask questions about subscriptions*.

PREPARE

1. Remove windshield if present.

REMOVE

1. Figure 2 Remove right and left mounting block screws (2). Retain screws.
2. Remove cover from duct assembly. See service manual.
3. Remove screws retaining right and left mounting blocks from underside of cover.
 - a. Discard mounting blocks and retain screws for later use.

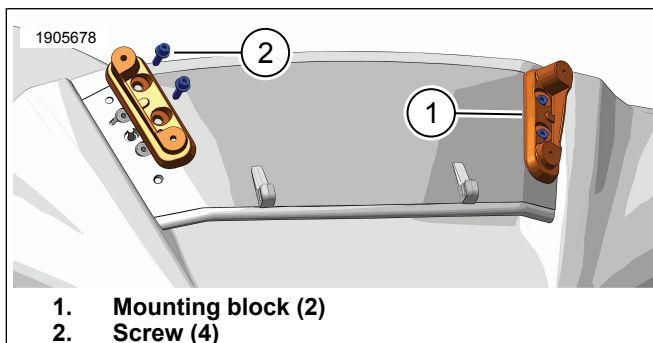


Figure 2. Remove Tall Mounting Blocks

INSTALL

1. Figure 3 Install **new** mounting blocks to cover.
 - a. Align and engage mounting block alignment pin with hole in cover.
 - b. Secure mounting block to cover with OE screw. Tighten.
Torque: 2.5–3.6 N·m (22–32 in-lbs)
 - c. Repeat on other side.

2. Install cover to duct assembly. See service manual.
3. Figure 1 Secure right and left mounting blocks (1,2) with OE screws (A). Tighten.
Torque: 2.8–3.4 N·m (25–30 in-lbs)

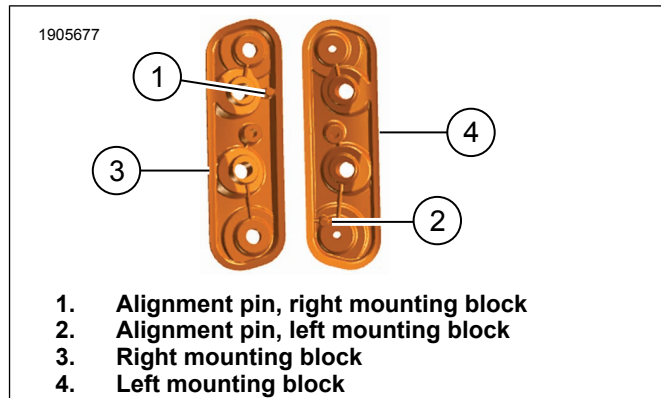


Figure 3. Right / Left Mounting Block Alignment Pin Locations