



# INSTRUCTIONS

J05492

2025-01-23



## LOW-PROFILE TOURING SEAT

### GENERAL INFORMATION

Table 1. General Information

Kits	Suggested Tools	Skill Level <sup>(1)</sup>
52000057, 52000248, 52000249, 52000750, 52000751	Safety Glasses, Torque Wrench	
<i>(1) Tightening to torque value or other moderate tools and techniques required</i>		

### KIT CONTENTS

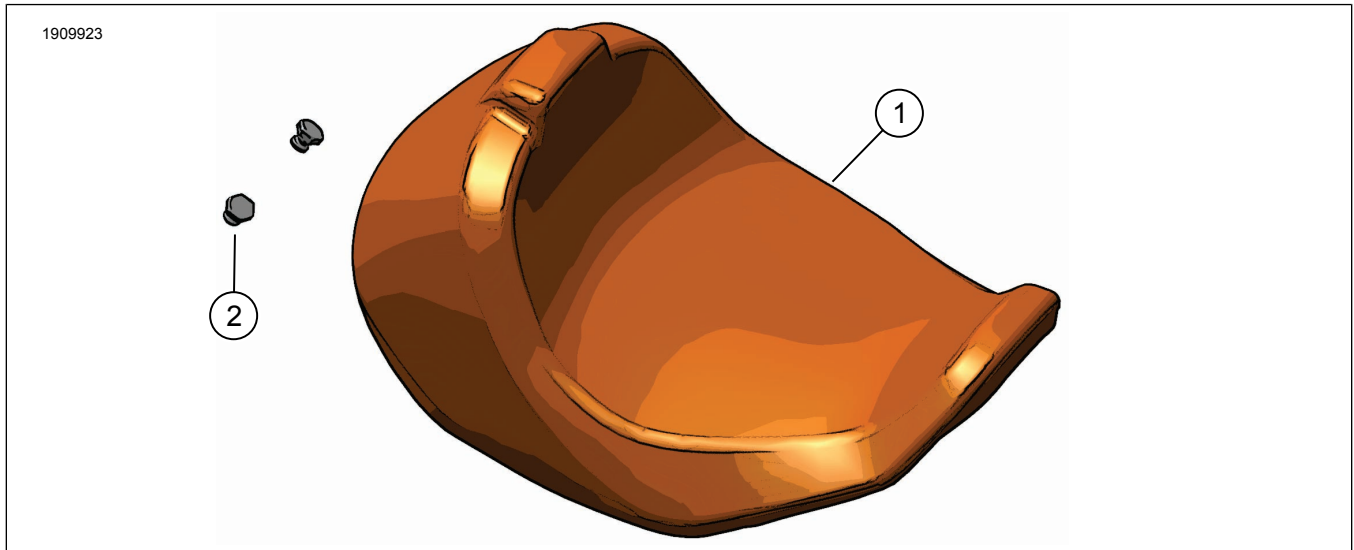


Figure 1. Kit Contents: Low-Profile Touring Seat (typical)

Table 2. Kit Contents: Low-Profile Touring Seat Kits

Verify that all contents are present in the kit before installing or removing items from vehicle.					
<input checked="" type="checkbox"/>	Item	Qty	Description	Part No.	Notes
<input type="checkbox"/>	1	1	Solo seat	Not sold separately	
<input type="checkbox"/>	2	2	Mounting nuts, seat	3633	Kits 52000057, 52000248, 52000249
<input type="checkbox"/>				10400077	Kits 52000750, 52000751

### GENERAL

#### Models

For model fitment information, see the Parts and Accessories (P&A) Retail Catalog or the Parts and Accessories section of [www.harley-davidson.com](http://www.harley-davidson.com).

Verify that the most current version of the instruction sheet is used. It is available at: [h-d.com/isheets](http://h-d.com/isheets)

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

### Installation Requirements

#### ⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333b)

#### NOTE

This instruction sheet references service manual information. A service manual for the year and model motorcycle is required for this installation and is available from:

- A Harley-Davidson dealer.
- H-D Service Information Portal, a subscription-based access available for most 2001 and newer models. For more information see Frequently ask questions about subscriptions.

## PREPARE

#### NOTE

When a solo seat is installed without a passenger seat, passenger footpegs or footboards and passenger grab strap must be removed.

1. Remove seat. See service manual.
2. Remove grab strap and nuts.

## REMOVE

1. Figure 2 Remove two nuts (1).
  - a. Leave plastic stud plate retaining washers (2) in place.

## INSTALL

1. If installing seat with a passenger pillion, refer to pillion instruction sheet to install pillion and grab strap.
2. Install **new** solo seat.
  - a. Figure 3 Slide sole seat (2) into position until front tab engages frame and rear of seat locales over mounting studs.
  - b. Install seat mounting nuts (1) onto studs. Tighten.  
Torque: 0.9–1.7 N·m (8–15 **in-lbs**)
  - c. After seat is installed, pull up on seat to verify that it is secure. See service manual.
3. If pillion is not being installed, pull down flap at rear of seat to cover mounting studs.

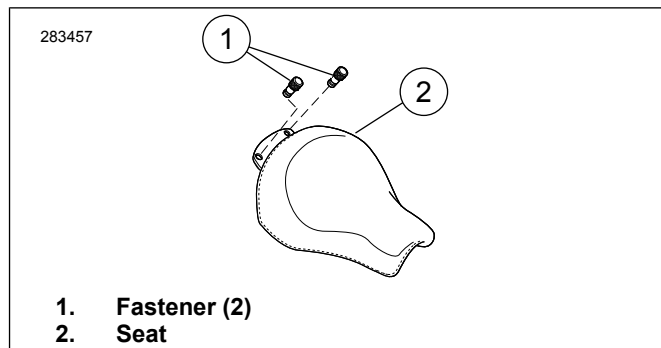


Figure 3. Solo Seat (typical)

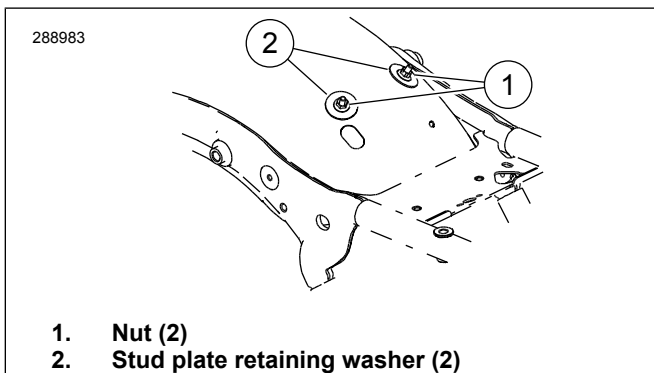


Figure 2. Remove/Install Nuts