



# INSTRUCTIONS

J02629

2025-05-05



## CHROME LOWER BELT GUARD COVER

### GENERAL INFORMATION

Table 1. General Information

Kits	Suggested Tools	Skill Level <sup>(1)</sup>
60408-09	Safety glasses, Torque wrench	
(1) Only simple tools and techniques required		

### KIT CONTENTS

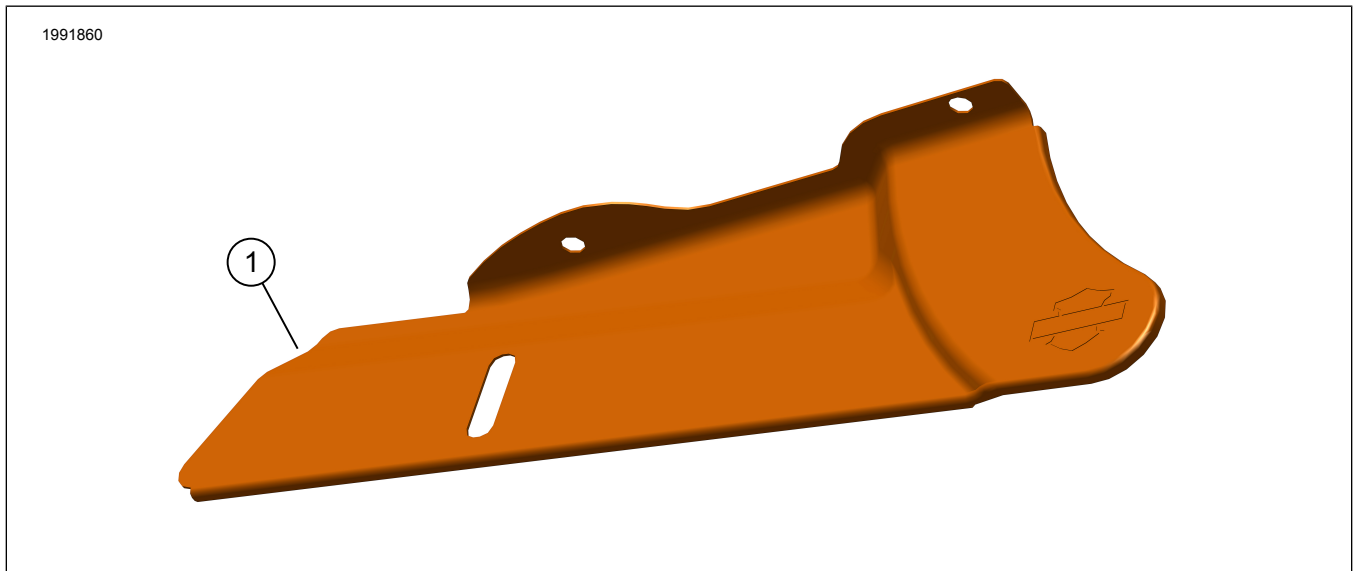


Figure 1. Kit Contents: Chrome Lower Belt Guard Cover

Table 2. Kit Contents: Chrome Lower Belt Guard Cover

Verify that all contents are present in the kit before installing or removing items from vehicle.					
<input checked="" type="checkbox"/>	Item	Qty	Description	Part No.	Notes
<input type="checkbox"/>	1	1	Cover, lower belt guard, chrome	Not sold separately	

### GENERAL

Instruction sheet is also available electronically. To verify you are using the most current version available, do one of the following:

- Go to [h-d.com/isheets](http://h-d.com/isheets)
- Scan QR code in upper left corner of the instruction sheet

#### NOTE

This instruction sheet **may have a Supplemental Video** to assist installer in clarifying a certain part of the assembly. A linked video would be located at the end of this instruction sheet.

### Models

For model fitment information, see the Parts and Accessories (P&A) Retail Catalog or the Parts and Accessories section of [www.harley-davidson.com](http://www.harley-davidson.com).

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

## Installation Requirements

### ⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333b)

### NOTE

This instruction sheet references service manual information. A service manual for the year and model motorcycle is required for this installation and is available from:

- A Harley-Davidson dealer.
- H-D Service Information Portal, a subscription-based access available for most 2001 and newer models. For more information see *Frequently ask questions about subscriptions*.

## PREPARE

1. Remove left saddlebag. See service manual.

## REMOVE

1. See Figure 2. Remove two screws (1) from Original Equipment (OE) belt guard. Save screws (1) for later use.

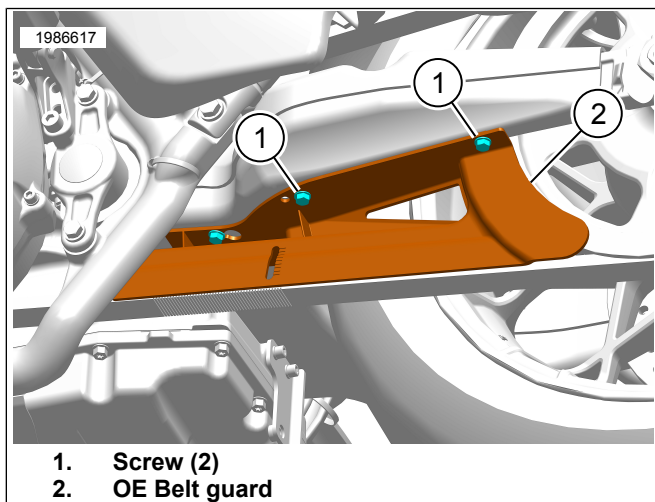


Figure 2. OE Belt Guard

## INSTALL

1. See Figure 3. Install chrome belt guard cover (2) over OE belt guard (1).
  - a. Making sure lower edge of belt guard is inserted into edge clip of cover.
2. Install screws (3) loosely.
3. Make sure that the chrome belt guard cover does not contact the drive belt, tire or wheel. If necessary, loosen screws (3) and reposition for clearance.

4. Tighten screws (3).

Torque: 7.3–9.6 N·m (65–85 in-lbs)

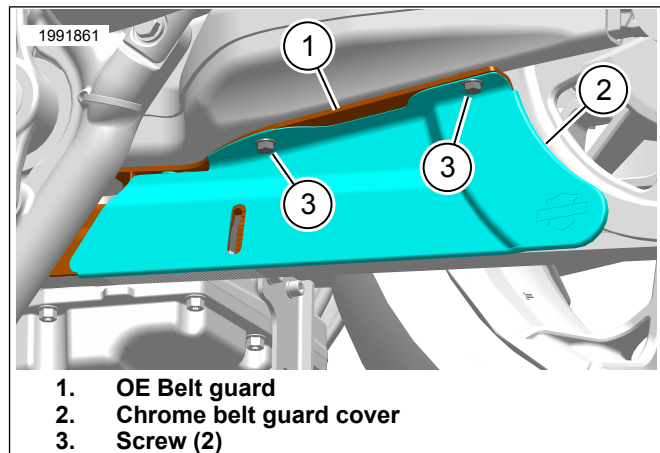


Figure 3. Install Chrome Cover

## COMPLETE

1. Install left saddlebag. See service manual.