



INSTRUCTIONS

-J00512

REV. 4-1-94

Kit Number 91100-94

DRESSER V-LOGO REAR FENDER RAIL

General

This kit is designed for installation on 1980 and later FLT, FLHT, FLHS and FLHR models.

This kit contains the following part. This kit has no service parts.

QTY	DESCRIPTION
1	Rail assembly, rear fender

Installation On All Models

NOTE

All models for which this kit is designed are equipped with a original equipment (stock) fender rail or bumper. Remove the stock bumper following the procedure given.

REMOVING STOCK FENDER RAIL

1. See Illustration. Reach under rear edge of fender and remove locknut (1) and washer (2). Retain locknut and washer and use to mount new fender rail.
2. Loosen and remove the two bolts (3), lock washers (4) and nuts (5) which attach fender rail to saddlebag support bracket. Retain bolts (3), lock washers (4) and nuts (5) and use to mount new fender rail.

INSTALLING V-LOGO FENDER RAIL

1. See Illustration. Place new fender rail in position and install washer (2), locknut (1), bolts (3), lock washers (4) and nuts (5).
2. Tighten locknut (1) to 10 ft-lbs torque and tighten bolts (3) and locknuts to 19 ft-lbs.(5)

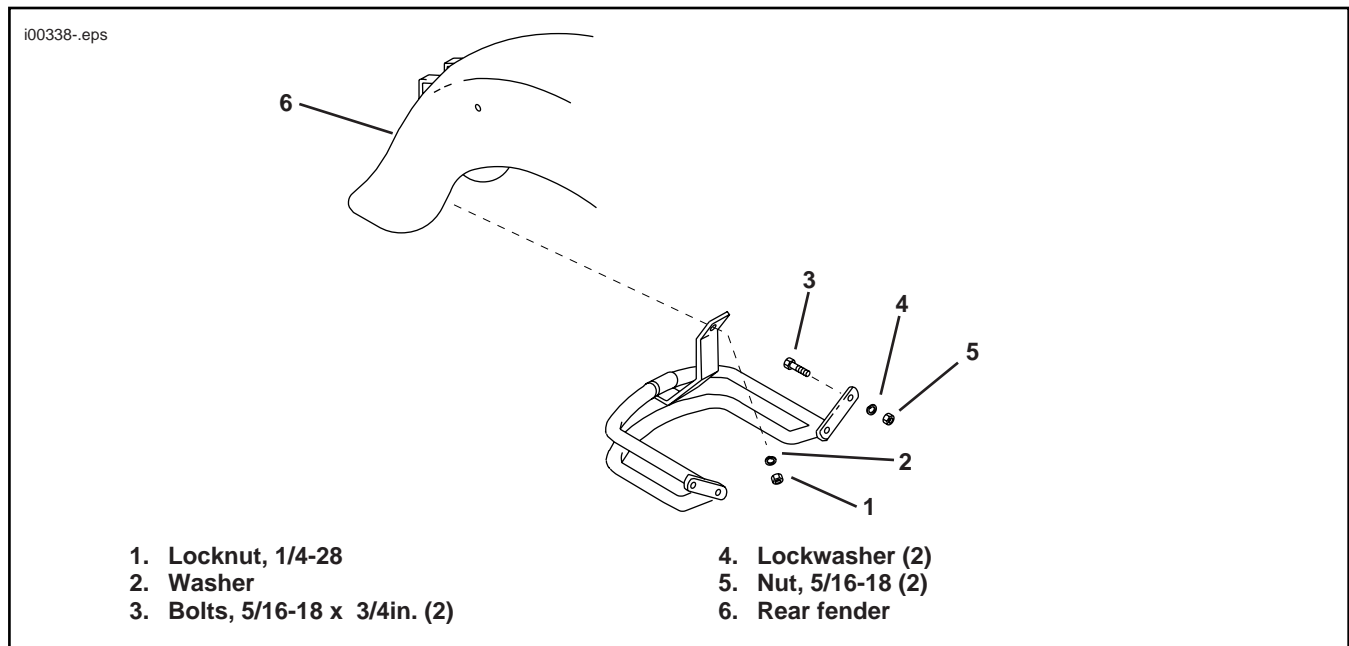


Illustration. Rear Fender Rail And Mounting Hardware