



INSTRUCTIONS

J02950

2013-11-01



CHROME FRONT MASTER CYLINDER COVER KIT

GENERAL

Kit Number

42313-04

Models

For model fitment information, see the P&A retail catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

See Figure 1 and Table 1.

INSTALLATION

NOTICE

Do not allow dirt or debris to enter the master cylinder reservoir. Dirt or debris in the reservoir can cause improper operation and equipment damage. (00205c)

1. Clean the front master cylinder cover, then remove and discard the two screws that hold the cover in place.
2. Remove and discard the original cover and gasket, and place the new diaphragm and plate onto the master cylinder reservoir. Position the new chrome cover onto the reservoir over the diaphragm.
3. Install the new polished stainless steel cover screws and tighten to 9-17 **in-lbs** (1.0-.2.0 Nm).

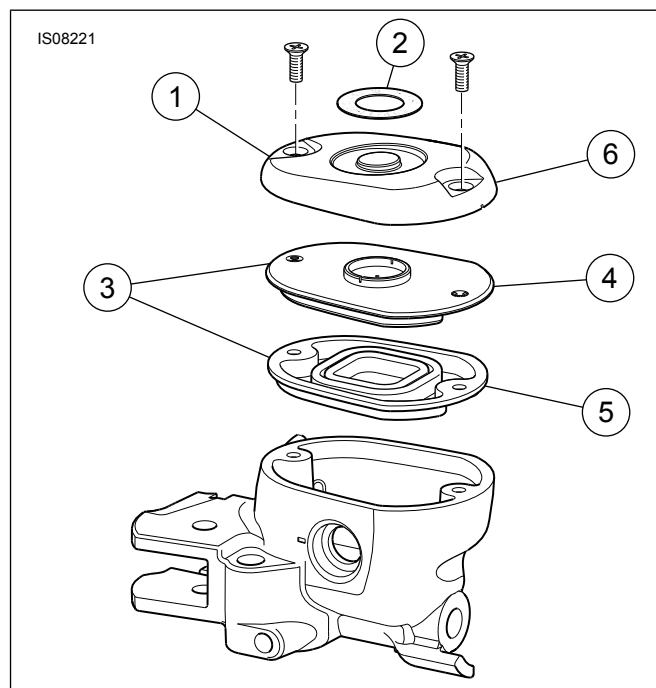


Figure 1. Service Parts

Table 1. Service Parts

Item	Description (Quantity)	Part Number
1	Cover, master cylinder reservoir	Not sold separately
2	Decal, warning	44791-04
3	Gasket kit (includes items 4 and 5)	42805-04
4	Plate, diaphragm	Not sold separately
5	Diaphragm	Not sold separately
6	Screw (2)	2498