



INSTRUCTIONS

94100041


2023-01-11



CLUTCH COVER KIT

GENERAL INFORMATION

Table 1.

Kits	Suggested Tools	Skill Level ⁽¹⁾
14101389, 14101390, 14101402, 14101443	Safety Glasses, Torque Wrench	 1 Dark wrench
<i>(1) Only simple tools and techniques required</i>		

KIT CONTENTS

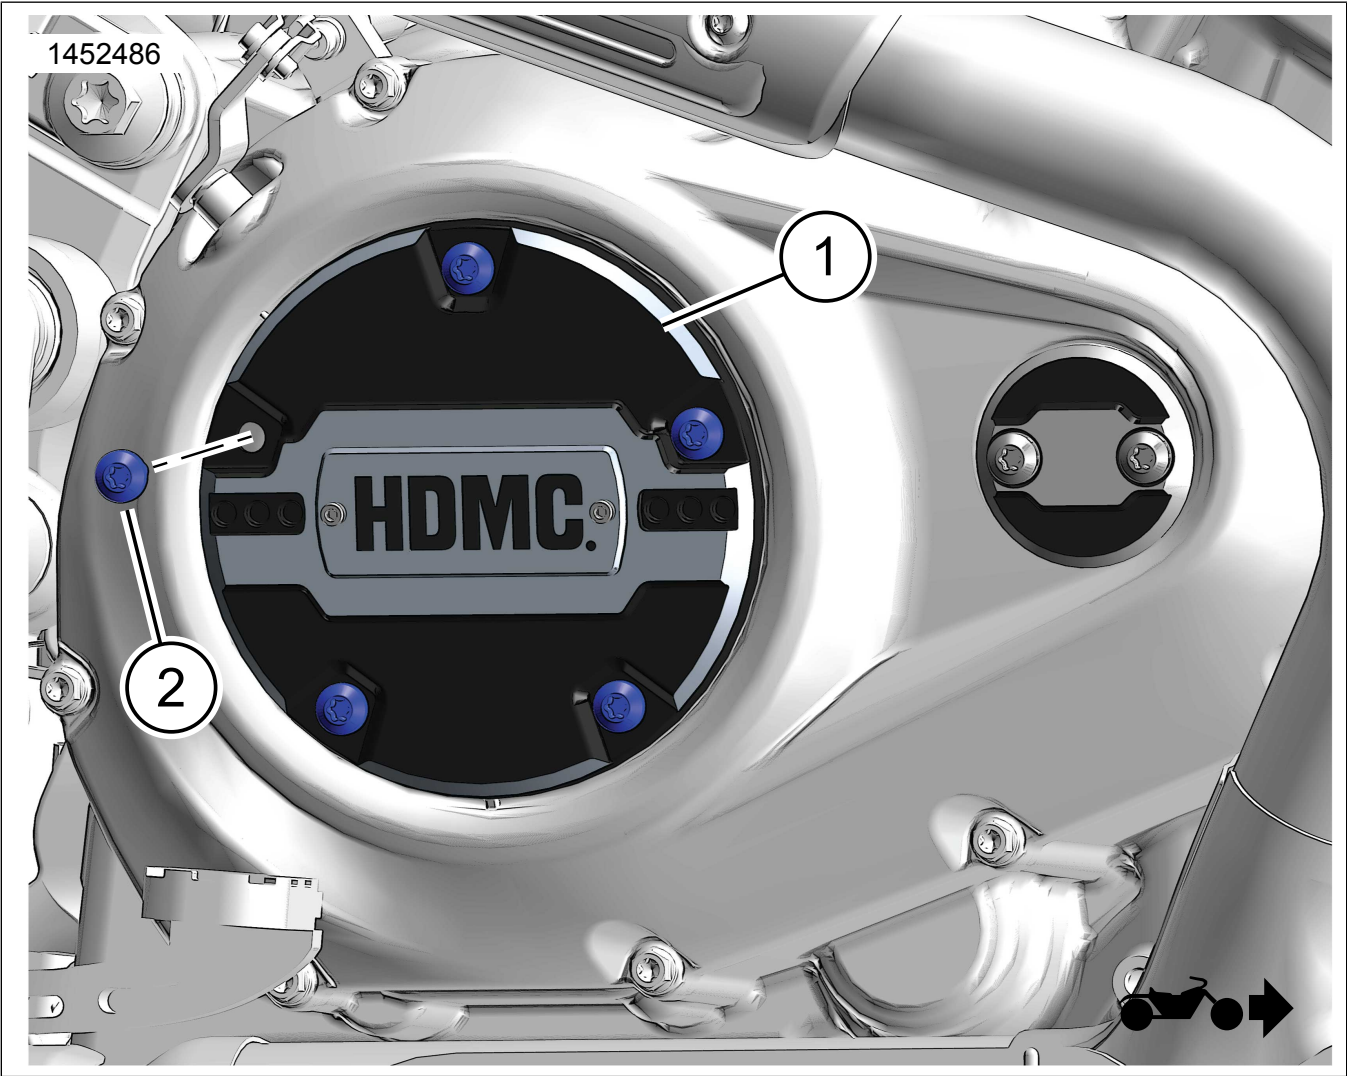


Figure 1. Kit Contents: Clutch Cover Kit

Table 2. Kit Contents: Clutch Cover Kit

<input checked="" type="checkbox"/>	Verify that all contents are present in the kit before installing or removing items from vehicle.			
	Item	Qty	Description	Part No.
<input type="checkbox"/>	1	1	clutch cover	Not sold separately
<input type="checkbox"/>	2	5	Screw	10201067

GENERAL

Models

For model fitment information, see the Parts and Accessories (P&A) Retail Catalog or the Parts and Accessories section of www.harley-davidson.com.

Verify that the most current version of the instruction sheet is used. It is available at: h-d.com/isheets

Contact Harley-Davidson Customer Support Center at 1-800-258-2464 (U.S. only) or 1-414-343-4056.

Installation Requirements

⚠ WARNING

Rider and passenger safety depend upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333b)

REMOVE

NOTE

Careful not to scratch paint or surface.

1. Remove Original Equipment (OE) clutch cover using plastic pry tool or fishing line.

INSTALL

NOTE

Only install screws with clutch cover in place to prevent permanent damage to primary cover.

It is not recommended to remove clutch cover once it is installed. These covers are not intended for multiple installations.

1. See Figure 1. Install clutch cover (1).
2. Align clutch cover holes to clutch case holes on vehicle.
3. See Figure 2. Secure with screws in a star pattern sequence. Tighten.

Torque: 6.5–9 N·m (58–80 in-lbs)

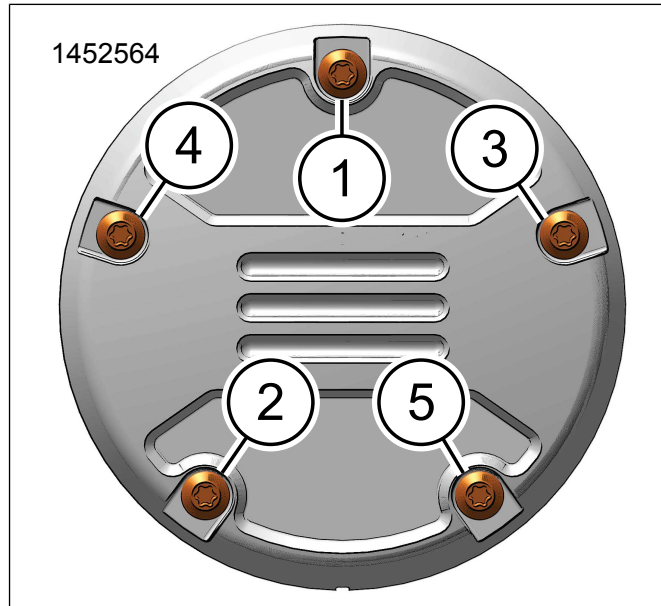


Figure 2. Torque Sequence (typical)

MAINTENANCE

Kits 14101390 and 14101402 contains exposed aluminum. Protect exposed aluminum with Harley-Davidson Protective Wipes (93600063), which reduces corrosion.