

INSTRUCTIONS

J05923

2014-06-02

COOLANT HOSE COVER KIT

GENERAL

Kit Number

26900107, 26900108

Models

For model fitment information, see the P&A Retail Catalog or harley-davidson.com (English only).

A WARNING


Rider and passenger safety depend upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308b)

Kit Contents

See Figure 2 and Table 1.

INSTALLATION

- 1. See Figure 1. Remove output sprocket cover screw (7) and washer (5). Remove washer from screw.
- 2. Remove ignition coil cover (8).
- 3. Remove two inner ignition coil bracket screws (1).
- 4. Slide coolant hose cover (2) under ignition coil bracket. Cover fits over coolant hoses.
- 5. Loosely install ignition coil bracket screws.
- 6. Place washer removed in step 1 between coolant hose cover tab (3) and sprocket cover (4).
- 7. Place D-washer (6) on sprocket cover screw.
- 8. Loosely install screw and D-washer.
- 9. Tighten sprocket cover screw to 9–11 N·m (80–97 in-lbs).
- 10. Tighten ignition coil bracket screws to 22.5–27.5 N⋅m (17–20 ft-lbs).
- 11. Install ignition coil cover.

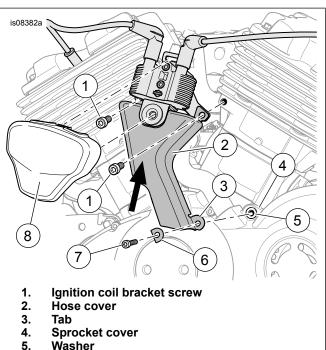

- b. wasner
- D-washer
 Sprocket cover sci
- Sprocket cover screw
 Ignition coil cover
 - Figure 1. Hose Cover

SERVICE PARTS




Figure 2. Service Parts

Table 1. Service Parts

Item	(,	Part Number
1	Hose cover	Not Sold Separately
2	D washer	10600033
Items mentioned in text, but not included in kit.		
Α	Stock washer	